

INDUSTRIAL CLAMPS & FASTENING SOLUTIONS

Hose clamps, pipe supports, cable ties and tie-down hardware
for industrial sourcing.

TECHNICAL CATALOG



BUILT FOR INDUSTRIAL SOURCING

A practical catalog for standard selection and custom project inquiries.



01 STANDARD SERIES

Broad size coverage for routine hose and pipe connection requirements.

02 HEAVY-DUTY

T-bolt, V-band and reinforced clamp structures for demanding assemblies.

03 PIPE SUPPORT

Clips, brackets, saddle clamps and U-bolts for routing and support.

04 OEM OPTIONS

Material, finish, dimensions, packaging and order consolidation can be discussed.

HOW TO USE THIS CATALOG

Confirm the product structure first, then match the size range and material shown on the relevant page.

01**SELECT PRODUCT TYPE**

Match the clamp or support structure to the hose, pipe, flange or routing requirement.

02**CHECK SIZE RANGE**

Use the listed minimum-maximum diameter, inch size or specified dimensions exactly as shown.

03**CONFIRM MATERIAL**

Material codes and available combinations vary by product. Refer to each technical page.

04**SEND ORDER DETAILS**

Include quantity, finish, packaging, application notes and any drawing or sample requirement.

IMPORTANT

Dimensions and material values in the original technical tables are preserved without modification.

ORDERING INFORMATION

Clear inquiry details help shorten product confirmation and quotation time.

PRODUCT

Product name or catalog page

SIZE

Diameter range, inch size or drawing dimensions

MATERIAL

Steel grade or material code shown on the page

FINISH

Zinc plated, stainless, coated or project-specific

QUANTITY

Required order quantity and delivery schedule

PACKAGING

Bulk, carton, label, barcode or private packaging

CUSTOM PROJECTS

For non-standard parts, provide a drawing, sample photo, target dimensions, material, quantity and application conditions.

★ Catalogue ★




★ Catalogue ★



Single Bolt Hose Clamp

Material:W1/W2/W4/W5

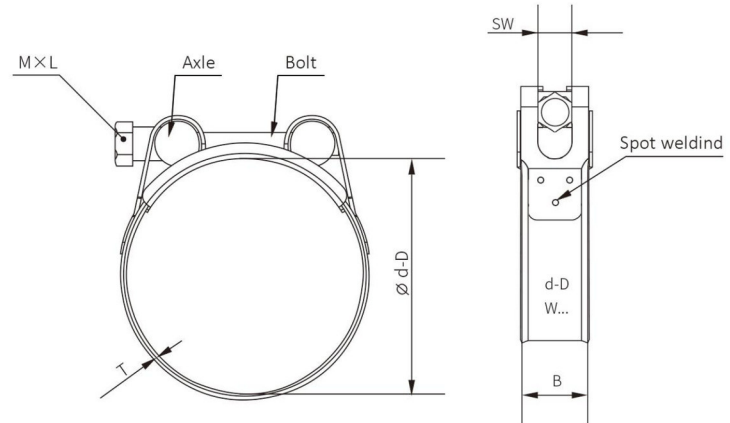

- ★ Gentle on the hose when the tightening force becomes high
- ★ Withstands hard tightening, repeated mounting and dismounting
- ★ Safe functionality in severe conditions
- ★ Typical applications
 - For large/reinforced hoses
 - Agriculture
 - Irrigation
 - Drainage systems
 - Sludge suction


Ød-D(mm) (min-max)	D (mm)	M×L (mm)	B (mm)	T (mm)		SW (mm)	AD (Nm)
				W1	W2-W4		
17-19	19	M5×40	18	0.6	0.6	8	4.5
20-22	22	M5×40	18	0.6	0.6	8	4.5
23-25	25	M5×40	18	0.6	0.6	8	4.5
26-28	28	M5×40	18	0.6	0.6	8	4.5
29-31	31	M6×50	20	0.8	0.6	8	4.5
32-35	35	M6×50	20	0.8	0.6	10	9
36-39	39	M6×50	20	0.8	0.6	10	9
40-43	43	M6×50	20	0.8	0.6	10	9
44-47	47	M6×55	22	1.2	0.8	10	9
48-51	51	M6×55	22	1.2	0.8	10	9
52-55	55	M6×55	22	1.2	0.8	10	9
56-59	59	M6×60	22	1.2	0.8	10	9
60-63	63	M6×60	22	1.2	0.8	10	9
64-67	67	M6×60	22	1.2	0.8	10	9
68-73	73	M8×70	24	1.5	0.8	13	18
74-79	79	M8×70	24	1.5	0.8	13	18
80-85	85	M8×70	24	1.5	0.8	13	18
86-91	91	M8×70	24	1.5	0.8	13	18
92-97	97	M8×70	24	1.5	0.8	13	18
98-103	103	M8×80	24	1.5	0.8	13	18
104-112	112	M8×80	24	1.5	0.8	13	18
113-121	121	M8×80	24	1.5	0.8	13	18
122-130	130	M8×80	24	1.5	0.8	13	18
131-139	139	M10×100	26	1.7	1.0	17	29
140-148	148	M10×100	26	1.7	1.0	17	29
149-161	161	M10×100	26	1.7	1.0	17	29
162-174	174	M10×100	26	1.7	1.0	17	29
175-187	187	M10×100	26	1.7	1.0	17	29
188-200	200	M10×100	26	1.7	1.0	17	29
201-213	213	M10×100	26	1.7	1.0	17	29
214-226	226	M10×100	26	1.7	1.0	17	29
227-239	239	M10×100	26	1.7	1.0	17	29
240-252	252	M10×100	26	1.7	1.0	17	29

Tips:

- ★ W1-All the parts are carbon steel
- ★ W2-Band and bridge plate are SS200 or SS300 series,others are carbon steel
- ★ W4-All the parts are SS200 or SS300 series
- ★ W5-All the parts are SS316

Double Bolt Pipe Clamp

Material:W1/W4/W5

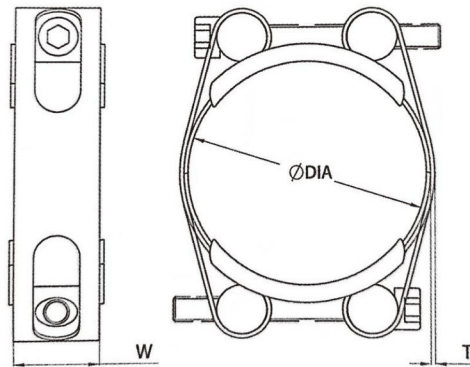

- ★ High break torque
- ★ Excellent tensile force
- ★ Large adjustment range
- ★ Typical applications
 - Agriculture
 - Drainage systems
 - Irrigation
 - Sludge suction


Size (mm)	Bolt	Bandwidth (mm)	Thickness (mm)
30-40	M6×50	20	1.0
35-45	M6×50	20	1.0
40-50	M6×50	20	1.0
45-55	M6×50	20	1.0
50-60	M6×50	20	1.0
55-65	M6×50	20	1.0
60-70	M6×50	20	1.0
65-75	M6×50	20	1.0
70-80	M6×50	20	1.0
75-85	M6×50	20	1.0
80-90	M6×50	20	1.0
90-100	M8×50	24	1.0
100-110	M8×60	24	1.0
110-120	M8×60	24	1.0
120-130	M8×60	24	1.0
130-140	M8×60	24	1.0
140-150	M8×60	24	1.0
150-160	M8×60	24	1.0
160-170	M8×60	24	1.0
170-180	M8×60	24	1.0
180-190	M8×60	24	1.0
190-200	M8×60	24	1.0
200-210	M8×60	24	1.0
210-220	M8×60	24	1.0
220-230	M8×60	24	1.0
230-240	M8×60	24	1.0
240-250	M8×60	24	1.0
250-260	M8×60	24	1.0
260-270	M8×60	24	1.0
270-280	M8×60	24	1.0
280-290	M8×60	24	1.0
290-300	M8×60	24	1.0
300-310	M8×60	24	1.0

Tips:

- ★ W1-All the parts are carbon steel
- ★ W4-All the parts are SS200 or SS300 series
- ★ W5-All the parts are SS316

Single Bolt Clamp With Handle

Material:W4

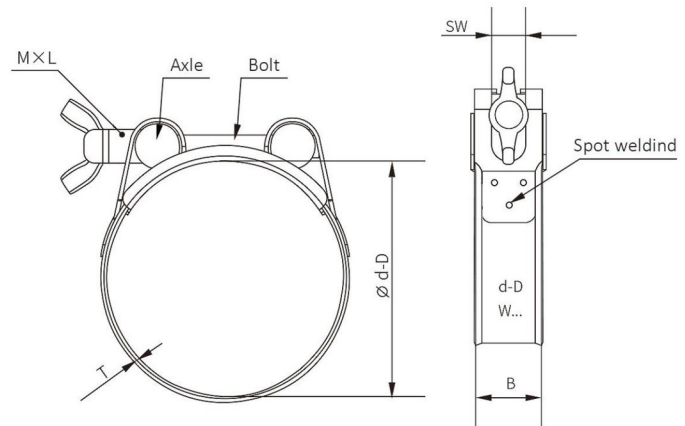

- ★ Rolled edge to prevent hose damage
- ★ Easy installation with handle
- ★ Superior sealing-tighter seals at lower bolt torques
- ★ Typical applications
 - For large/reinforced hoses
 - Agriculture
 - Irrigation
 - Drainage systems
 - Sludge suction


$\varnothing d-D(mm)$ (min-max)	D (mm)	M×L (mm)	B (mm)	T (mm)
17-19	19	M5×40	18	0.6
20-22	22	M5×40	18	0.6
23-25	25	M5×40	18	0.6
26-28	28	M5×40	18	0.6
29-31	31	M6×50	20	0.6
32-35	35	M6×50	20	0.6
36-39	39	M6×50	20	0.6
40-43	43	M6×50	20	0.6
44-47	47	M6×55	22	0.8
48-51	51	M6×55	22	0.8
52-55	55	M6×55	22	0.8
56-59	59	M6×55	22	0.8
60-63	63	M6×60	22	0.8
64-67	67	M6×60	22	0.8
68-73	73	M8×70	24	0.8
74-79	79	M8×70	24	0.8
80-85	85	M8×70	24	0.8
86-91	91	M8×70	24	0.8
92-97	97	M8×70	24	0.8
98-103	103	M8×80	24	0.8
104-112	112	M8×80	24	0.8
113-121	121	M8×80	24	0.8
122-130	130	M8×80	24	0.8
131-139	139	M10×90	26	1.0
140-148	148	M10×90	26	1.0
149-161	161	M10×90	26	1.0
162-174	174	M10×90	26	1.0
175-187	187	M10×90	26	1.0
188-200	200	M10×90	26	1.0
201-213	213	M10×90	26	1.0
214-226	226	M10×90	26	1.0
227-239	239	M10×90	26	1.0
240-252	252	M10×90	26	1.0

Tips:

- ★ W4-All the parts are SS200 or SS300 series

Single Bolt Double Band Pipe Clamp

Material:W1/W4/W5

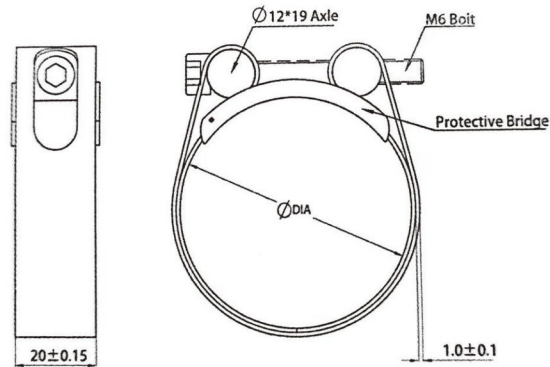

- ★ High break torque
- ★ Excellent tensile force
- ★ Typical applications
 - Agriculture
 - Drainage systems
 - Irrigation
 - Sludge suction


Size (mm)	Bolt	Bandwidth (mm)	Thickness (mm)
35-40	M6*45	20	1.0
40-45	M6*45	20	1.0
34-50	M6*45	20	1.0
50-55	M6*45	20	1.0
55-60	M6*45	20	1.0
60-65	M6*45	20	1.0
65-70	M6*45	20	1.0
70-75	M6*45	20	1.0
75-80	M6*45	20	1.0
80-85	M6*45	20	1.0
85-90	M6*45	20	1.0
90-95	M6*45	20	1.0
95-100	M6*45	20	1.0
100-105	M6*45	20	1.0
105-110	M6*45	20	1.0
110-115	M6*45	20	1.0
115-120	M6*45	20	1.0
120-125	M6*45	20	1.0
125-130	M6*45	20	1.0
130-135	M6*45	20	1.0
135-140	M6*45	20	1.0
140-145	M6*45	20	1.0
145-150	M6*45	20	1.0
150-155	M6*45	20	1.0
155-160	M6*45	20	1.0
160-165	M6*45	20	1.0
165-170	M6*45	20	1.0
170-175	M6*45	20	1.0
175-180	M6*45	20	1.0
180-185	M6*45	20	1.0
185-190	M6*45	20	1.0
190-195	M6*45	20	1.0
195-200	M6*45	20	1.0

Tips:

- ★ W1-All the parts are carbon steel
- ★ W4-All the parts are SS200 or SS300 series
- ★ W5-All the parts are SS316

T Bolt Pipe Clamp

Material:W2/W4/W5

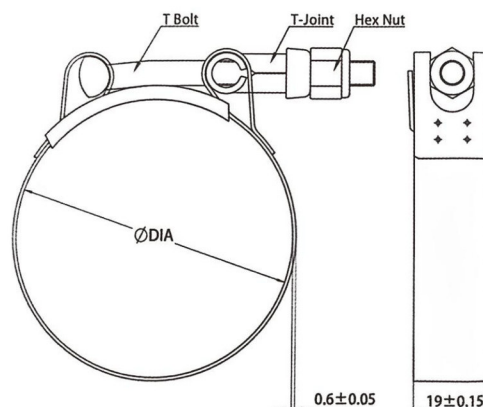

- ★ High-strength clamp design
- ★ Available with Spring design for constant tension
- ★ Typical applications
 - Commercial vehicles
 - Passenger vehicles
 - Industrial
 - Infrastructure


Size (mm)	Bandwidth (mm)	Thickness (mm)
35-40	19	0.6/0.8/1.0
38-43	19	0.6/0.8/1.0
41-46	19	0.6/0.8/1.0
42-49	19	0.6/0.8/1.0
47-54	19	0.6/0.8/1.0
52-60	19	0.6/0.8/1.0
56-64	19	0.6/0.8/1.0
59-67	19	0.6/0.8/1.0
63-71	19	0.6/0.8/1.0
70-78	19	0.6/0.8/1.0
74-83	19	0.6/0.8/1.0
80-89	19	0.6/0.8/1.0
86-95	19	0.6/0.8/1.0
92-101	19	0.6/0.8/1.0
96-104	19	0.6/0.8/1.0
109-117	19	0.6/0.8/1.0
116-124	19	0.6/0.8/1.0
122-130	19	0.6/0.8/1.0
129-136	19	0.6/0.8/1.0
132-140	19	0.6/0.8/1.0
138-146	19	0.6/0.8/1.0
141-149	19	0.6/0.8/1.0
147-155	19	0.6/0.8/1.0
154-162	19	0.6/0.8/1.0
160-168	19	0.6/0.8/1.0
166-174	19	0.6/0.8/1.0
173-181	19	0.6/0.8/1.0
179-187	19	0.6/0.8/1.0
187-195	19	0.6/0.8/1.0

Tips:

- ★ W2-Band, bridge plate and t-joint are SS200 or SS300 series, others are carbon steel
- ★ W4-All the parts are SS200 or SS300 series
- ★ W5-All the parts are SS316

T Bolt Spring Pipe Clamp

Material:W2/W4/W5

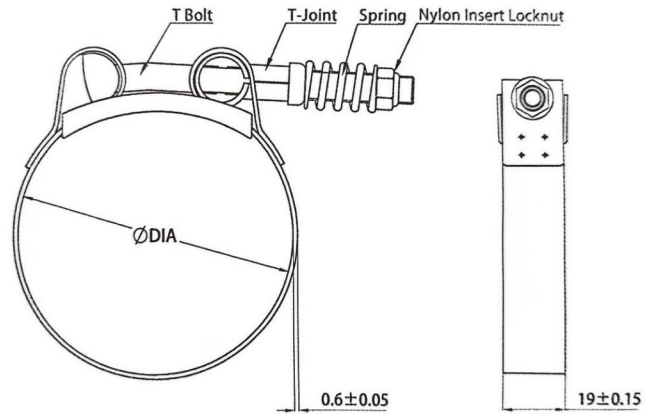

- ★ Increased sealing reliability across a wide temperature range
- ★ Automatic re-tension during temperature changes
- ★ High-strength clamp design
- ★ Typical applications
 - Designed for a wide variety of automotive industrial and marine applications


Size (mm)	Bandwidth (mm)	Thickness (mm)
46-52	19	0.6/0.8/1.0
49-57	19	0.6/0.8/1.0
52-60	19	0.6/0.8/1.0
56-64	19	0.6/0.8/1.0
59-67	19	0.6/0.8/1.0
65-73	19	0.6/0.8/1.0
71-79	19	0.6/0.8/1.0
76-84	19	0.6/0.8/1.0
78-86	19	0.6/0.8/1.0
83-91	19	0.6/0.8/1.0
90-98	19	0.6/0.8/1.0
92-100	19	0.6/0.8/1.0
103-111	19	0.6/0.8/1.0
109-117	19	0.6/0.8/1.0
116-124	19	0.6/0.8/1.0
122-130	19	0.6/0.8/1.0
129-136	19	0.6/0.8/1.0
132-140	19	0.6/0.8/1.0
138-146	19	0.6/0.8/1.0
141-149	19	0.6/0.8/1.0
147-155	19	0.6/0.8/1.0
154-162	19	0.6/0.8/1.0
160-168	19	0.6/0.8/1.0
166-174	19	0.6/0.8/1.0
173-181	19	0.6/0.8/1.0
179-187	19	0.6/0.8/1.0
187-195	19	0.6/0.8/1.0

Tips:

- ★ W2-Band,bridge plate and t-joint are SS200 or SS300 series,others are carbon steel
- ★ W4-All the parts are SS200 or SS300 series
- ★ W5-All the parts are SS316

German Type Hose Clamp-9mm

Material:W1/W2/W4/W5

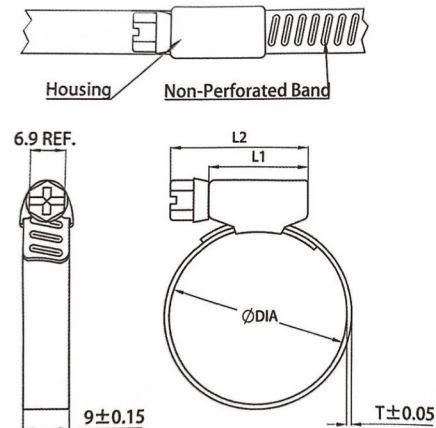

- ★ Multi-range hose clamp
- ★ Clamping ranges in accordance with DIN 3017
- ★ Larger diameters available on request
- ★ Applications
 - Joining cooling water lines
 - Depressurized and pressurized fuel lines and ventilation systems
 - Oil lines
 - Joining lines in sanitary applications
 - Joining lines in machine building applications
 - Lines in the household appliance industry
 - Hose lines in the commercial vehicle industries


Tips:

- ★ W1-All the parts are carbon steel
- ★ W2-Band and housing are SS200 or SS300 series,screw is carbon steel
- ★ W4-All the parts are SS200 or SS300 series
- ★ W5-All the parts are SS316

Size (mm)	Bandwidth (mm)	Thickness(mm)	
		W1	W2/W4/W5
8-12	9	0.7	0.6
10-16	9	0.7	0.6
12-22	9	0.7	0.6
16-25	9	0.7	0.6
20-32	9	0.7	0.6
25-40	9	0.7	0.6
30-45	9	0.7	0.6
32-50	9	0.7	0.6
40-60	9	0.7	0.6
50-70	9	0.7	0.6
60-80	9	0.7	0.6
70-90	9	0.7	0.6
80-100	9	0.7	0.6
90-110	9	0.7	0.6
100-120	9	0.7	0.6
110-130	9	0.7	0.6
120-140	9	0.7	0.6
130-150	9	0.7	0.6
140-160	9	0.7	0.6
150-170	9	0.7	0.6
160-180	9	0.7	0.6
170-190	9	0.7	0.6
180-200	9	0.7	0.6
190-210	9	0.7	0.6
200-220	9	0.7	0.6
210-230	9	0.7	0.6
220-240	9	0.7	0.6
230-250	9	0.7	0.6
240-260	9	0.7	0.6
250-270	9	0.7	0.6

German Type Hose Clamp-12mm

Material:W1/W2/W4/W5

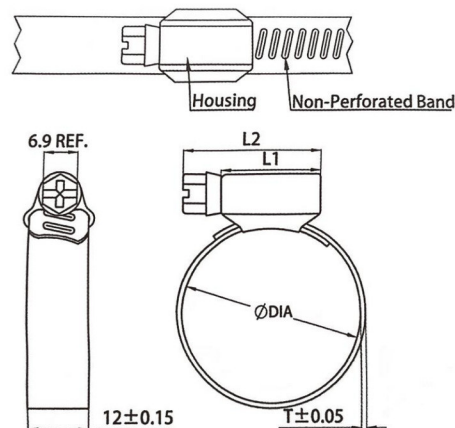

- ★ Heavy duty,non perforated band
- ★ Rolled edge to protect hose damage
- ★ Standard DIN3017
- ★ Applications
 - Joining cooling water lines
 - Depressurized and pressurized fuel lines and ventilation systems
 - Oil lines
 - Joining lines in sanitary applications
 - Joining lines in machine building applications
 - Lines in the household appliance industry
 - Hose lines in the commercial vehicle industries


Tips:

- ★ W1-All the parts are carbon steel
- ★ W2-Band and housing are SS200 or SS300 series,screw is carbon steel
- ★ W4-All the parts are SS200 or SS300 series
- ★ W5-All the parts are SS316

Size (mm)	Bandwidth (mm)	Thickness(mm)	
		W1	W2/W4/W5
12-20	12	0.7	0.6
16-25	12	0.7	0.6
20-32	12	0.7	0.6
25-40	12	0.7	0.6
32-50	12	0.7	0.6
40-60	12	0.7	0.6
50-70	12	0.7	0.6
60-80	12	0.7	0.6
70-90	12	0.7	0.6
80-100	12	0.7	0.6
90-110	12	0.7	0.6
100-120	12	0.7	0.6
110-130	12	0.7	0.6
120-140	12	0.7	0.6
130-150	12	0.7	0.6
140-160	12	0.7	0.6
150-170	12	0.7	0.6
160-180	12	0.7	0.6
170-190	12	0.7	0.6
180-200	12	0.7	0.6
190-210	12	0.7	0.6
200-220	12	0.7	0.6
210-230	12	0.7	0.6
220-240	12	0.7	0.6
230-250	12	0.7	0.6
240-260	12	0.7	0.6
250-270	12	0.7	0.6
260-280	12	0.7	0.6
270-290	12	0.7	0.6
280-300	12	0.7	0.6

German Type Hose Clamp With Handle-9mm

Material:W1/W2/W4/W5

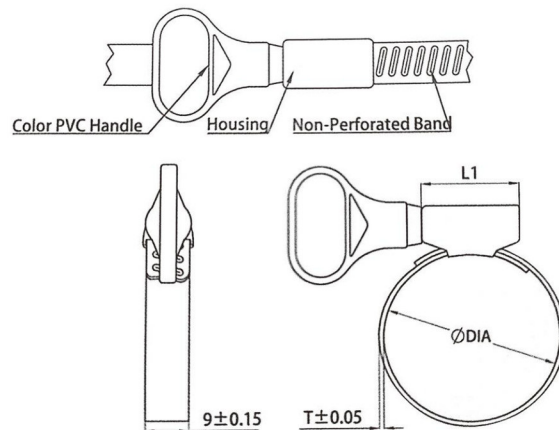

- ★ The clamp can be tightened or opened manually
- ★ Easy installation
- ★ Large diameters available on request
- ★ Applications
 - Joining cooling water lines
 - Depressurized and pressurized fuel lines and ventilation systems
 - Oil lines


Size (mm)	Bandwidth (mm)	Thickness(mm)	
		W1	W2/W4/W5
8-12	9	0.7	0.6
10-16	9	0.7	0.6
12-22	9	0.7	0.6
16-25	9	0.7	0.6
20-32	9	0.7	0.6
25-40	9	0.7	0.6
30-45	9	0.7	0.6
32-50	9	0.7	0.6
40-60	9	0.7	0.6
50-70	9	0.7	0.6
60-80	9	0.7	0.6
70-90	9	0.7	0.6
80-100	9	0.7	0.6
90-110	9	0.7	0.6
100-120	9	0.7	0.6
110-130	9	0.7	0.6
120-140	9	0.7	0.6
130-150	9	0.7	0.6
140-160	9	0.7	0.6
150-170	9	0.7	0.6
160-180	9	0.7	0.6
170-190	9	0.7	0.6
180-200	9	0.7	0.6
190-210	9	0.7	0.6
200-220	9	0.7	0.6
210-230	9	0.7	0.6
220-240	9	0.7	0.6
230-250	9	0.7	0.6
240-260	9	0.7	0.6
250-270	9	0.7	0.6

Tips:

- ★ W1-All the parts are carbon steel
- ★ W2-Band and housing are SS200 or SS300 series,screw is carbon steel
- ★ W4-All the parts are SS200 or SS300 series
- ★ W5-All the parts are SS316
- ★ Handle:plastic/carbon steel/stainless steel

German Type Hose Clamp With Handle-12mm

Material:W1/W2/W4/W5

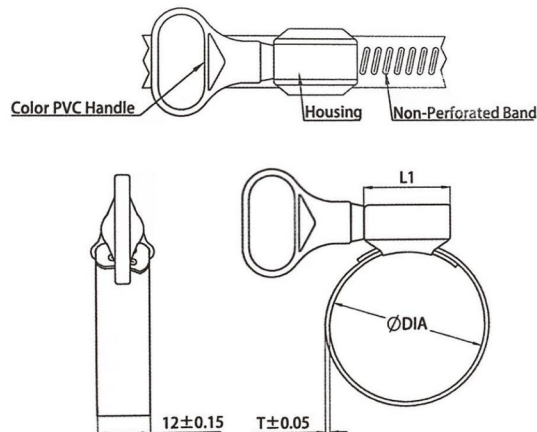

- ★ Band is much wider
- ★ Install with a simple hand twist, no tools required
- ★ Easy to remove and replace
- ★ Applications
 - Joining lines in machine building applications
 - Lines in the household appliance industry
 - Hose lines in the commercial vehicle industries


Tips:

- ★ W1-All the parts are carbon steel
- ★ W2-Band and housing are SS200 or SS300 series, screw is carbon steel
- ★ W4-All the parts are SS200 or SS300 series
- ★ W5-All the parts are SS316
- ★ Handle: plastic/carbon steel/stainless steel

Size (mm)	Bandwidth (mm)	Thickness(mm)	
		W1	W2/W4/W5
12-20	12	0.7	0.6
16-25	12	0.7	0.6
20-32	12	0.7	0.6
25-40	12	0.7	0.6
32-50	12	0.7	0.6
40-60	12	0.7	0.6
50-70	12	0.7	0.6
60-80	12	0.7	0.6
70-90	12	0.7	0.6
80-100	12	0.7	0.6
90-110	12	0.7	0.6
100-120	12	0.7	0.6
110-130	12	0.7	0.6
120-140	12	0.7	0.6
130-150	12	0.7	0.6
140-160	12	0.7	0.6
150-170	12	0.7	0.6
160-180	12	0.7	0.6
170-190	12	0.7	0.6
180-200	12	0.7	0.6
190-210	12	0.7	0.6
200-220	12	0.7	0.6
210-230	12	0.7	0.6
220-240	12	0.7	0.6
230-250	12	0.7	0.6
240-260	12	0.7	0.6
250-270	12	0.7	0.6
260-280	12	0.7	0.6
270-290	12	0.7	0.6
280-300	12	0.7	0.6

Partial Head German Type Hose Clamp

Material:W1/W2/W4/W5

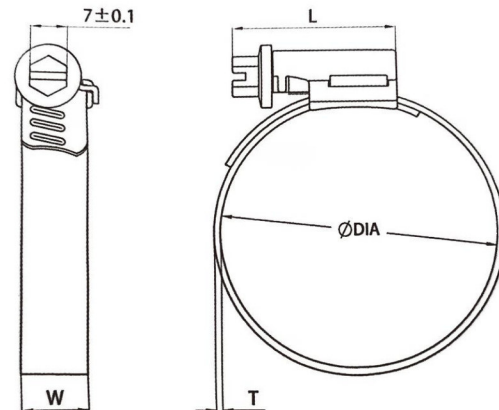

- ★ The asymmetric housing provides high force superior torque and even distribution of clamping pressure
- ★ Clamp aligns perfectly on the hose and ensures the optimal sealing of the connection
- ★ Applications:
 - Joining cooling water lines
 - Depressurized and pressurized fuel lines and ventilation systems
 - Oil lines
 - Joining lines in sanitary applications
 - Joining lines in machine building applications
 - Lines in the household appliance industry
 - Hose lines in the commercial vehicle industries


Tips:

- ★ W1-All the parts are carbon steel
- ★ W2-Band and housing are SS200 or SS300 series,screw is carbon steel
- ★ W4-All the parts are SS200 or SS300 series
- ★ W5-All the parts are SS316

Size (mm)	Bandwidth (mm)	Thickness(mm)	
		W1	W2/W4/W5
8-12	9/12	0.8	0.7
10-16	9/12	0.8	0.7
12-22	9/12	0.8	0.7
16-27	9/12	0.8	0.7
20-32	9/12	0.8	0.7
25-40	9/12	0.8	0.7
30-45	9/12	0.8	0.7
32-50	9/12	0.8	0.7
40-60	9/12	0.8	0.7
50-70	9/12	0.8	0.7
60-80	9/12	0.8	0.7
70-90	9/12	0.8	0.7
80-100	9/12	0.8	0.7
90-110	9/12	0.8	0.7
100-120	9/12	0.8	0.7
110-130	9/12	0.8	0.7
120-140	9/12	0.8	0.7
130-150	9/12	0.8	0.7
140-160	9/12	0.8	0.7
150-170	9/12	0.8	0.7
160-180	9/12	0.8	0.7
170-190	9/12	0.8	0.7
180-200	9/12	0.8	0.7
190-210	9/12	0.8	0.7
200-220	9/12	0.8	0.7
210-230	9/12	0.8	0.7
220-240	9/12	0.8	0.7
230-250	9/12	0.8	0.7
240-260	9/12	0.8	0.7
250-270	9/12	0.8	0.7

Partial Head German Type Hose Clamp With Spring

Material:W2/W4/W5

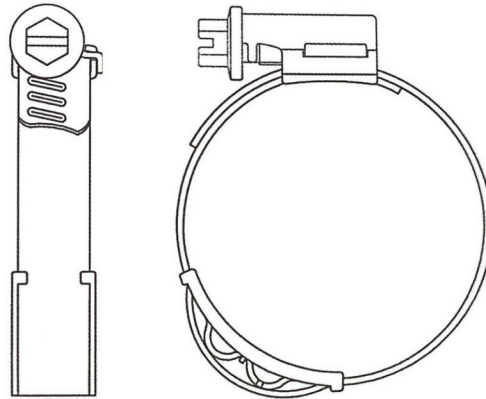

- ★ Automatic re-tension effect in the event of hose relaxation
- ★ Increased sealing reliability across a wide temperature range
- ★ Applications:
 - Hose lines in the commercial vehicle and automotive industries


Tips:

- ★ W2-Band and housing are SS430 screw is carbon steel
- ★ W4-All the parts are SS304
- ★ W5-All the parts are SS316
- ★ Spring:stainless steel

Size (mm)	Bandwidth (mm)	Thickness (mm)
8-12	9/12	0.7
10-16	9/12	0.7
12-22	9/12	0.7
16-27	9/12	0.7
20-32	9/12	0.7
25-40	9/12	0.7
30-45	9/12	0.7
32-50	9/12	0.7
40-60	9/12	0.7
50-70	9/12	0.7
60-80	9/12	0.7
70-90	9/12	0.7
80-100	9/12	0.7
90-110	9/12	0.7
100-120	9/12	0.7
110-130	9/12	0.7
120-140	9/12	0.7
130-150	9/12	0.7
140-160	9/12	0.7
150-170	9/12	0.7
160-180	9/12	0.7
170-190	9/12	0.7
180-200	9/12	0.7
190-210	9/12	0.7
200-220	9/12	0.7
210-230	9/12	0.7
220-240	9/12	0.7
230-250	9/12	0.7
240-260	9/12	0.7
250-270	9/12	0.7

American Type Worm Drive Hose Clamp

Material:W1W2/W4/W5

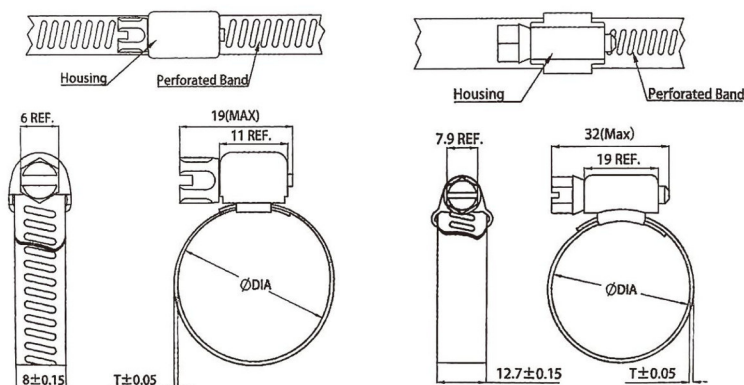

- ★ Screw housing for easy tightening
- ★ 'In-line'housing, which enables every thread on the worm to engage with the band
- ★ Perforated band
- ★ Applications
 - Generally used in small diameter applications such as air&fuel lines
 - Automobiles, plumbing, home and garden
 - Industrial applications

Tips:

- ★ W1-All the parts are carbon steel
- ★ W2-Band is SS200 or SS300 series, housing and screw are carbon steel
- ★ W2-Band and housing are SS200 or SS300 series, screw is carbon steel
- ★ W4-All the parts are SS200 or SS300 series
- ★ W5-All the parts are SS316


Size (mm)	Inch	Bandwidth (mm)	Thickness(mm)	
			W1	W2/W4/W5
8-12	1/2"	8	0.6	0.55
10-16	5/8"	8	0.6	0.55
13-19	3/4"	8	0.6	0.55
13-23	7/8"	8	0.6	0.55
16-25	1"	8	0.6	0.55
22-32	1-1/4"	10/12.7	0.7	0.6
25-38	1-1/2"	10/12.7	0.7	0.6
32-44	1-3/4"	10/12.7	0.7	0.6
35-51	2"	10/12.7	0.7	0.6
38-57	2-1/4"	10/12.7	0.7	0.6
44-64	2-1/2"	10/12.7	0.7	0.6
46-70	2-3/4"	10/12.7	0.7	0.6
52-76	3"	10/12.7	0.7	0.6
59-83	3-1/4"	10/12.7	0.7	0.6
70-89	3-1/2"	10/12.7	0.7	0.6
72-95	3-3/4"	10/12.7	0.7	0.6
89-101	4"	10/12.7	0.7	0.6
84-108	4-1/4"	10/12.7	0.7	0.6
91-114	4-1/2"	10/12.7	0.7	0.6
105-127	5"	10/12.7	0.7	0.6
117-140	5-1/2"	10/12.7	0.7	0.6
130-153	6"	10/12.7	0.7	0.6
142-165	6-1/2"	10/12.7	0.7	0.6
155-178	7"	10/12.7	0.7	0.6

Note:

According to the requirement of customers, other sizes and material are also available

American Type Hose Clamp With Handle

Material:W2/W4/W5

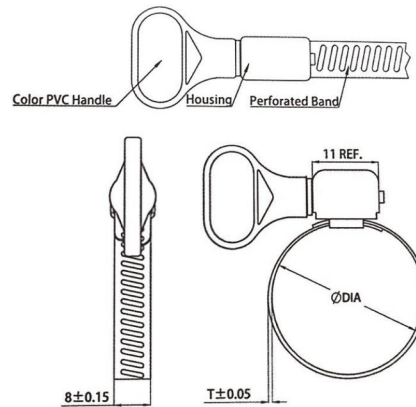

- ★ Innovative design installs with a simple hand twist
no tools required
- ★ Easy to remove and replace
- ★ Pull off the screw cap for a tamper-resistant connection
- ★ Application
 - Gas pipe,water pipe,oil pipe fastening
 - Automobiles
 - Industry
 - Agriculture
 - Household

Tips:

- ★ W2-Band is SS200 or SS300 series,housing and screw are carbon steel
- ★ W2-Band and housing are SS200 or SS300 series,screw is carbon steel
- ★ W4-All the parts are SS200 or SS300 series
- ★ W5-All the parts are SS316
- ★ Handle:plastic/carbon steel/stainless steel


Size (mm)	Bandwidth (mm)	Thickness (mm)
8-12	8	0.55
10-16	8	0.55
13-19	8	0.55
16-25	8	0.55
19-29	8	0.55
22-32	8	0.55
25-38	8	0.55
32-44	12.7	0.6
35-51	12.7	0.6
38-57	12.7	0.6
44-64	12.7	0.6
51-70	12.7	0.6
64-76	12.7	0.6
70-89	12.7	0.6
76-92	12.7	0.6
80-100	12.7	0.6

Note:

According to the requirement of customers,other sizes and material are also available

High Torque Worm Drive Hose Clamp

Material:W4/W5

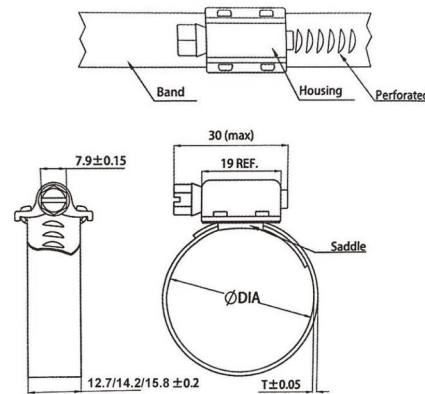

- ★ Reusable
- ★ Secure and reliable installation
- ★ Easy to re-tighten in cases of expansion (due to temperature fluctuations)
- ★ No loss of material when installing
- ★ Easy installation of two signs on one pole
- ★ Applications
 - Traffic signs, street signs, billboards and illuminated signs installation
 - Heavy duty sealing applications
 - Agricultural
 - Chemical Industry
 - Food Processing
 - Fluid Transfer
 - Marine Industry
 - Petrochemical Industry
 - Shipyards

Size (mm)	Inch	Bandwidth (mm)	Thickness (mm)	Bandwidth (mm)	Thickness (mm)
10-16	5/8"	12.7/14.2	0.6	15.8	0.8
13-19	3/4"	12.7/14.2	0.6	15.8	0.8
16-25	1"	12.7/14.2	0.6	15.8	0.8
19-29		12.7/14.2	0.6	15.8	0.8
22-32	1 1/4"	12.7/14.2	0.6	15.8	0.8
25-38	1 1/2"	12.7/14.2	0.6	15.8	0.8
32-44	1 3/4"	12.7/14.2	0.6	15.8	0.8
35-51	2"	12.7/14.2	0.6	15.8	0.8
38-57	2 1/4"	12.7/14.2	0.6	15.8	0.8
44-64	2 1/2"	12.7/14.2	0.6	15.8	0.8
51-70	2 3/4"	12.7/14.2	0.6	15.8	0.8
64-76	3"	12.7/14.2	0.6	15.8	0.8
70-89	3 1/2"	12.7/14.2	0.6	15.8	0.8
76-92	3 3/4"	12.7/14.2	0.6	15.8	0.8
80-100	4"	12.7/14.2	0.6	15.8	0.8
90-110	4 1/4"	12.7/14.2	0.6	15.8	0.8
100-120	4 3/4"	12.7/14.2	0.6	15.8	0.8
110-130	5 1/4"	12.7/14.2	0.6	15.8	0.8
120-140	5 1/2"	12.7/14.2	0.6	15.8	0.8
130-150	6"	12.7/14.2	0.6	15.8	0.8
140-160	6 1/2"	12.7/14.2	0.6	15.8	0.8
150-170		12.7/14.2	0.6	15.8	0.8
160-180		12.7/14.2	0.6	15.8	0.8

Note:


According to the requirement of customers, other sizes and material are also available

Tips:

- ★ W4-All the parts are SS200 or SS300 series
- ★ W5-All the parts are SS316

Heavy Duty (HD)Worm Drive Hose Clamp

Material:W4

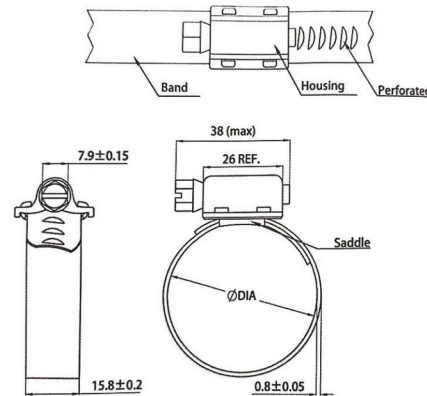

- ★ HD is suitable for special applications where harsh torques and contact pressures are required
- ★ This clamp is an add-on type to our range of worm drive hose clips and therefore only available in 16 mm band width and W4 material quality
- ★ The extended bridge prevents leaks and hose being damaged
- ★ Applications
 - Mounting of silicone, plastic and rubber tubing with steel inserts

Size (mm)	Bandwidth (mm)	Thickness (mm)
25-45	15.8	0.8
32-54	15.8	0.8
45-66	15.8	0.8
57-79	15.8	0.8
70-92	15.8	0.8
83-105	15.8	0.8
95-117	15.8	0.8
108-130	15.8	0.8
121-143	15.8	0.8
134-156	15.8	0.8
146-168	15.8	0.8
159-181	15.8	0.8
172-194	15.8	0.8
184-206	15.8	0.8
197-219	15.8	0.8
210-232	15.8	0.8

Note:


According to the requirement of customers, other sizes and material are also available

Tips:

- ★ W4-All the parts are SS304

Constant Torque Hose Clamp

Material:W2/W4

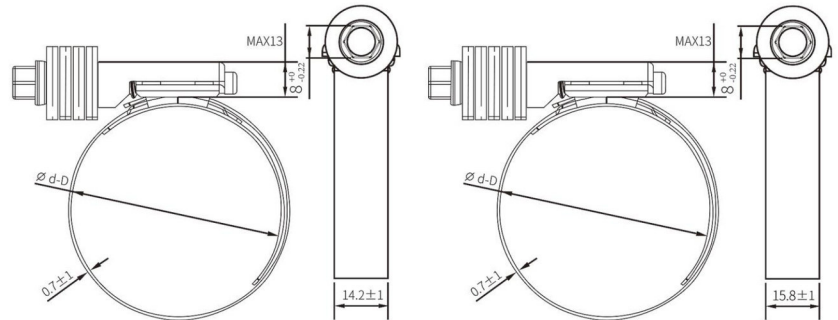

- ★ Constant Torque Worm Drive Hose Clamp is a breakthrough in clamping technology
- ★ The belleville spring mechanism permits the constant torque clamp to automatically increase or decrease its own diameter due to changes in operational or environmental temperatures
- ★ This unique design eliminates "cold flow" leaks
- ★ This heavy duty construction has an extended inner liner which protects all types of hoses from damage and helps to maintain consistent pressure
- ★ Applications
 - Commercial vehicle
 - Passenger vehicle

Size (mm)	Bandwidth (mm)	Thickness (mm)	Bandwidth (mm)	Thickness (mm)
25-45	14.2	0.65	15.8	0.8
32-54	14.2	0.65	15.8	0.8
45-66	14.2	0.65	15.8	0.8
57-79	14.2	0.65	15.8	0.8
70-92	14.2	0.65	15.8	0.8
83-105	14.2	0.65	15.8	0.8
95-117	14.2	0.65	15.8	0.8
108-130	14.2	0.65	15.8	0.8
121-143	14.2	0.65	15.8	0.8
134-156	14.2	0.65	15.8	0.8
146-168	14.2	0.65	15.8	0.8
159-181	14.2	0.65	15.8	0.8
172-194	14.2	0.65	15.8	0.8
184-206	14.2	0.65	15.8	0.8
197-219	14.2	0.65	15.8	0.8
210-232	14.2	0.65	15.8	0.8

Note:


According to the requirement of customers, other sizes and material are also available

Tips:

- ★ W2-Band, housing and washer are SS300 series or SS400 series, screw is carbon steel
- ★ W4-All the parts are SS304

Dual Bead Constant Tension Hose Clamp

Material:W4

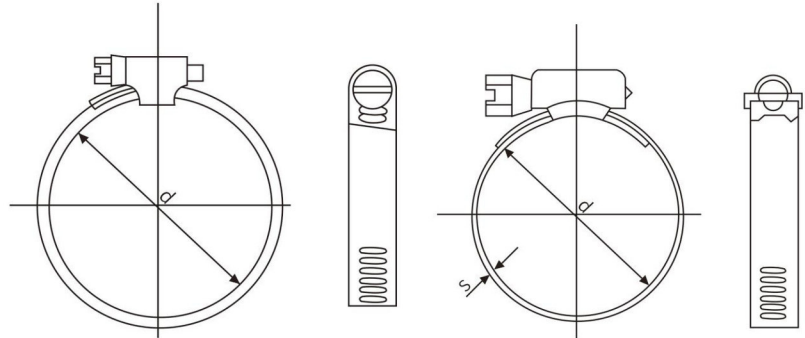

- ★ The most cost effective way to ensure a consistent seal on your hoses without damage
- ★ The inner dual bead design puts band-sealing pressure where it is needed, providing 30 percent more sealing performance than standard worm drive clamps
- ★ This allows superb sealing characteristics and is safe for all soft hose use such as air to air and coolant applications
- ★ Applications
 - Commercial vehicle
 - Passenger vehicle
 - Industrial
 - Infrastructure
 - Automobile

Size (mm)	Inch Size	Bandwidth (mm)
10-16	3/8-5/8	12.7
13-19	1/2-3/4	12.7
16-23	5/8-7/8	12.7
19-27	3/4-1 1/16	12.7
16-32	5/8-1 1/4	12.7
19-38	3/4-1 1/2	12.7
19-44	3/4-1 3/4	12.7
32-51	1 1/4-2	12.7
38-57	1 1/2-2 1/4	12.7
40-64	1 9/16-2 1/2	12.7
46-70	1 13/16-2 3/4	12.7
57-76	2 1/4-3	12.7
67-83	2 5/8-3 1/4	12.7
65-89	2 9/16-3 1/2	12.7
72-95	2 13/16-3 3/4	12.7
78-101	3 1/16-4	12.7
84-108	3 5/16-4 1/4	12.7
91-114	3 9/16-4 1/2	12.7
105-127	4 1/8-5	12.7
117-140	4 5/8-5 1/2	12.7
105-152	5 1/8-6	12.7
114-165	5 9/16-6 1/2	12.7
156-178	6 1/8-7	12.7
177-203	7-8	12.7
203-228	8-9	12.7
228-254	9-10	12.7

Note:


According to the requirement of customers, other sizes and material are also available

Tips:

- ★ W4-All the parts are SS201 or SS304

British Type Hose Clamp

Material:W1/W4/W5

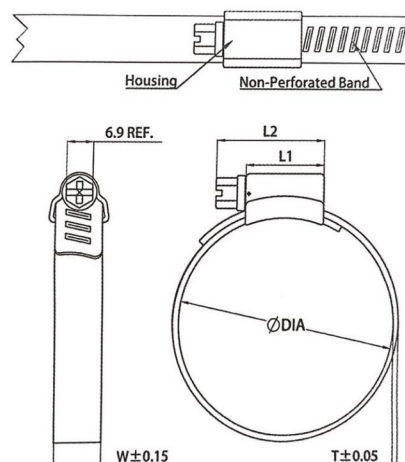

★ Strong one-piece pressed housing, rolled-up band edges and a smooth band underside that protects the hose

★ High clamping force

★ High breaking torque

★ Protection of the hose thanks to the smooth band underside

★ Applications

- Machine building
- Chemical industry
- Irrigation systems
- Railway
- Agricultural and building machines
- Marine industry

Size (mm)	Code	Code	Bandwidth (mm)	Thickness (mm)
9.5-12	OOO	3/8 - 1/2	9.7	0.8
11-16	MOO	1/2 - 5/8	9.7	0.8
13-20	OO	1/2 - 3/4	9.7	0.8
16-22	O	5/8 - 7/8	9.7	0.8
18-25	OX	3/4 - 1	9.7	0.8
22-30	1A	7/8 - 1 1/8	9.7	0.8
25-35	1	1 - 1 3/8	11.7	0.9
30-40	1X	1 1/8 - 1 5/8	11.7	0.9
32-45	1M	1 1/4 - 1 3/4	11.7	0.9
35-50	2A	1 3/8 - 2	11.7	0.9
40-55	2	1 5/8 - 2 1/8	11.7	0.9
45-60	2X	1 3/4 - 2 3/8	11.7	0.9
55-70	3	2 1/8 - 2 3/4	11.7	0.9
60-80	3X	2 3/8 - 3 1/8	11.7	0.9
70-90	4	2 3/4 - 3 1/2	11.7	0.9
85-100	4X	3 1/4 - 4	11.7	0.9
90-120	5	3 1/2 - 4 3/4	11.7	0.9
110-140	6	4 3/8 - 5 1/2	11.7	0.9
120-150	6X	4 3/4 - 5 7/8	11.7	0.9
135-165	7	5 1/4 - 6 1/2	11.7	0.9
158-190	7 1/2	6 1/4 - 7 1/2	11.7	0.9
184-216	8 1/2	7 1/4 - 8 1/2	11.7	0.9
210-242	9 1/2	8 1/4 - 9 1/2	11.7	0.9
235-267	10 1/2	9 1/4 - 10 1/2	11.7	0.9
260-292	11 1/2	10 1/4 - 11 1/2	11.7	0.9
286-318	12 1/2	11 1/4 - 12 1/2	11.7	0.9

Tips:


- ★ W1-All the parts are carbon steel
- ★ W4-All the parts are SS200 or SS300 series
- ★ W5-All the parts are SS316

Note:

According to the requirement of customers, other sizes and material are also available

Blue Housing British Type Hose Clamp

Material:W1/W2

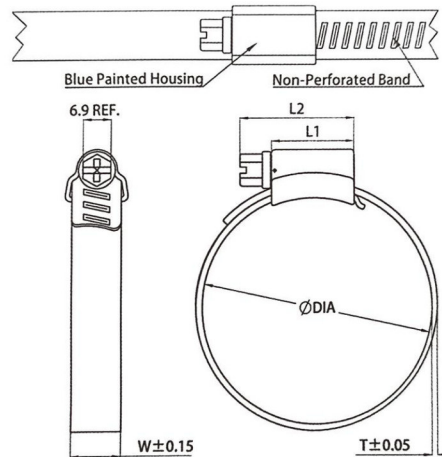

- ★ A newly designed housing positioned to more evenly distribute a high clamping force and give safer guidance of the emerging band
- ★ The short housing saddle also provides optimal contact pressure on the hose
- ★ High clamping force
- ★ High break torque
- ★ Lower idle torque
- ★ Applications
 - Machine building
 - Chemical industry
 - Irrigation systems
 - Railway
 - Agricultural and building machines
 - Marine industry

Size (mm)	Bandwidth (mm)	Thickness (mm)
8-14	9.7	0.8
11-17	9.7	0.8
13-20	9.7	0.8
15-24	9.7	0.8
19-28	9.7	0.8
15-24	11.7	0.9
19-28	11.7	0.9
22-32	11.7	0.9
26-38	11.7	0.9
32-44	11.7	0.9
32-50	11.7	0.9
44-56	11.7	0.9
44-65	11.7	0.9
51-70	11.7	0.9
58-75	11.7	0.9
68-85	11.7	0.9
77-95	11.7	0.9
87-112	11.7	0.9
104-138	11.7	0.9
130-165	11.7	0.9

Note:


According to the requirement of customers, other sizes and material are also available

Tips:

- ★ W1-All the parts are carbon steel
- ★ W2-Band is SS200 or SS300 series, housing and screw are carbon steel

Rubber Lined P Clip

Material:W1/W4

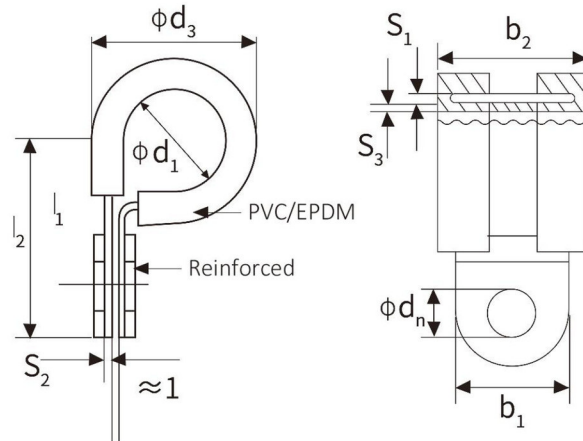

- ★ It is suitable for all kinds of fastening and retaining applications: pipes,cables,cable harnesses,cable protection pipes,hoses and other lines
- ★ Easy installation and secure fastening
- ★ Reinforced band ends for extremely high mechanical loads
- ★ Rubber profile protects against vibrations and creeping water,is sound-absorbent and protects against contact corrosion
- ★ Applications
 - Machine building
 - Railway industry
 - Agricultural machines
 - Chemical industry
 - Building machines
 - Ship manufacturing
 - Irrigation systems
 - Engine manufacturing

Size (mm)	Bandwidth (mm)	Thickness(mm)		Hole size	
		W1	W4/W5	Width:12/15	Width:20
4	12	0.7	0.6	M6	M8
6	12/15	0.7	0.6	M6	M8
8	12/15	0.7	0.6	M6	M8
10	12/15/20	0.7	0.6	M6	M8
12	12/15/20	0.7	0.6	M6	M8
14	12/15/20	0.7	0.6	M6	M8
16	12/15/20	0.7	0.6	M6	M8
18	12/15/20	0.7	0.6	M6	M8
20	12/15/20	0.7	0.6	M6	M8
22	12/15/20	0.7	0.6	M6	M8
24	12/15/20	0.7	0.6	M6	M8
26	12/15/20	0.7	0.6	M6	M8
28	12/15/20	0.7	0.6	M6	M8
30	12/15/20	0.7	0.6	M6	M8
32	12/15/20	0.7	0.6	M6	M8
34	12/15/20	0.7	0.6	M6	M8
36	12/15/20	0.7	0.6	M6	M8
38	12/15/20	0.7	0.6	M6	M8
40	12/15/20	0.7	0.6	M6	M8
42	12/15/20	0.7	0.6	M6	M8
44	12/15/20	0.7	0.6	M6	M8
46	12/15/20	0.7	0.6	M6	M8
48	12/15/20	0.7	0.6	M6	M8
50	12/15/20	0.7	0.6	M6	M8

Note:

According to the requirement of customers,other sizes and material are also available

Tips:

- ★ W1-Carton steel
- ★ W4-SS200 or SS300 series
- ★ Rubber:EPDM/Silicone/PVC and so on

Spring Hose Clip


Material: 65Mn steel / 51CRV4



- ★ One-piece, bolt-free hose clamp
- ★ Even distribution of clamping force
- ★ Optimum roundness
- ★ Automatically re-tensions to accommodate temperature fluctuations
- ★ Applications
 - Machine building
 - White goods
 - Agricultural machines
 - Engine manufacturing
 - Cooling and heating water circuits
 - Fuel vent system
 - Air ducts

Tips:



- ★ Zinc-plated 65Mn spring steel
- ★ Dacromet 65Mn spring steel
- ★ MAGNI&GEOMET Anti-corrosion Coatings

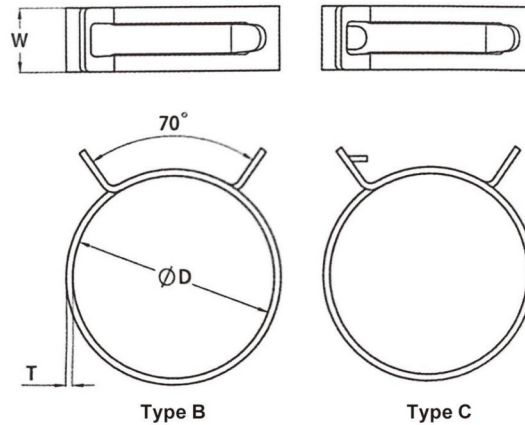

Size (mm)	Bandwidth (mm)	Thickness (mm)
4	6	0.4
5	6	0.6
6	6	0.6
7	6	0.6
8	8	0.7
9	8	0.7
9.5	8	0.7
10	8	0.8
10.5	8	0.8
11	8	0.8
11.5	8	0.8
12	8	0.8
12.5	8	0.8
13	10	1.0
13.5	10	1.0
14	10	1.0
14.5	10	1.0
15	10	1.0
16	12	1.0
17	12	1.0
18	12	1.0
19	12	1.0
20	12	1.0
21	12	1.2
23	12	1.2
24	12	1.2
25	12	1.2
26	12	1.2
27	15	1.5
28	15	1.5
29	15	1.5
30	15	1.5
33	15	1.8

Double Wire Hose Clip

Material:W1/W4

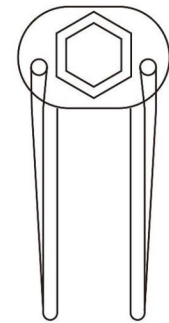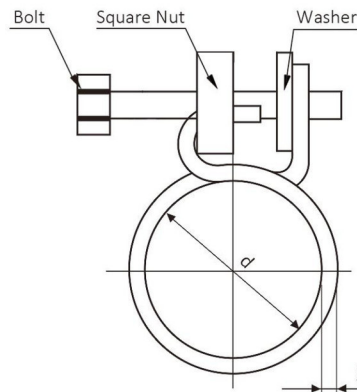

- ★ Double wire designed screw clamps are very useful and provide great clamping force
- ★ The smooth edges of the round wire are harmless to hands or hoses
- ★ Double steel wire are more stronger and can be used for long time fastening
- ★ Convenient to use, simply release and tighten the screw to adjust the clamp diameter
- ★ Application
 - Pumps, hosing and filters
 - White goods

Size (mm)	Wire Diameter(mm)		Screw(mm)	
	W1	W4	W1	W4
8-12	1.4	1.8	M5*30	M5*35
11-14	1.4	1.8	M5*30	M5*35
13-16	1.4	1.8	M5*30	M5*35
16-19	1.4	1.8/2	M5*30	M5*35/M6*40
19-22	1.7	1.8/2	M6*35	M5*35/M6*40
21-25	1.7	1.8/2/3	M6*35	M5*35/M6*40/M8*50
22-27	1.7	1.8/2/3	M6*35	M5*35/M6*40/M8*50
25-30	1.7	1.8/2/3	M6*35	M5*35/M6*40/M8*50
26-29	1.7	1.8/2/3	M6*35	M5*35/M6*40/M8*50
27-32	1.7	2/3	M6*35	M5*35/M6*40
30-35	1.8	2/3	M6*35	M5*35/M6*40
35-40	1.8	2/3	M6*35	M5*35/M6*40
40-45	1.8	3	M6*40	M8*60
43-48	1.8	3	M6*40	M8*60
46-51	1.8	3	M6*40	M8*60
50-55	1.8	3	M6*40	M8*60
52-57	1.8	3	M6*40	M8*60
55-60	1.8	3	M6*40	M8*60
60-65	2.0	3	M6*40	M8*60
65-70	2.0	3	M6*50	M8*70
71-76	2.0	3	M6*50	M8*70
75-80	2.0	3	M6*50	M8*70
80-85	2.0	3	M6*50	M8*70
85-90	2.0	3	M6*50	M8*70
90-95	2.1	3	M6*50	M8*70
95-100	2.1	3	M6*50	M8*70
100-105	2.1	3	M6*50	M8*70
105-110	2.1	3	M6*50	M8*70
110-115	2.1	3	M6*50	M8*70
115-120	2.1	3	M6*50	M8*70
120-125	2.1	3	M6*50	M8*70
125-130	2.1	3	M6*50	M8*70

Tips:


- ★ W1-All the parts are carbon steel
- ★ W4-All the parts are SS200 or SS300 series

Double Wire Clamp With Handle

Material:W1


Tips:

- ★ W1-all the parts are carbon steel

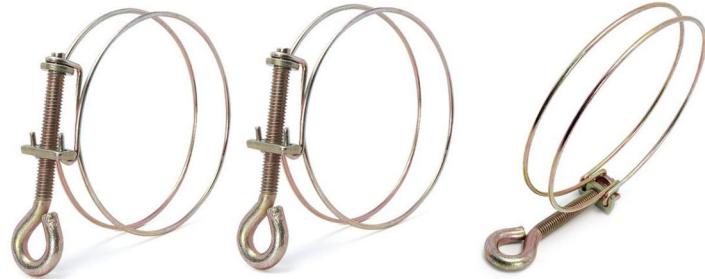

Double Wire Spring Hose Clamp

Material:Spring steel/W4 SS304

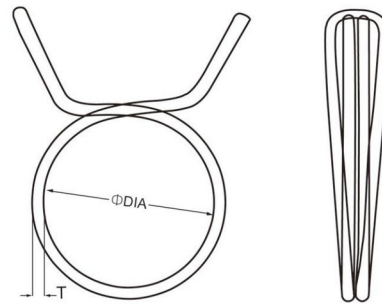

- ★ Self Tightening and Sealing
- ★ Almost constant clamping force
- ★ Adapt to changing characteristics of Hose
- ★ Low Cost
- ★ Applications
 - Pumps,hosing and filters
 - White goods


Tips:

- ★ Spring Steel and zinc plated
- ★ W4-All the parts are SS304

Size (mm)	Wire Diameter (mm)	Material
4	0.8	Spring steel/SS304
5	0.8	Spring steel/SS304
6	0.8	Spring steel/SS304
7	1.0	Spring steel/SS304
8	1.0	Spring steel/SS304
9	1.0	Spring steel/SS304
10	1.2	Spring steel/SS304
11	1.2	Spring steel/SS304
12	1.2	Spring steel/SS304
13	1.2	Spring steel/SS304
14	1.6	Spring steel/SS304
15	1.6	Spring steel/SS304
16	1.6	Spring steel/SS304
17	1.6	Spring steel/SS304
18	2.0	Spring steel/SS304
20	2.0	Spring steel/SS304
22	2.2	Spring steel/SS304
24	2.5	Spring steel/SS304
26	2.5	Spring steel/SS304
28	2.5	Spring steel/SS304
30	2.5	Spring steel/SS304
32	2.5	Spring steel/SS304
34	2.5	Spring steel/SS304

Single Ear Hose Clip

Material:W4

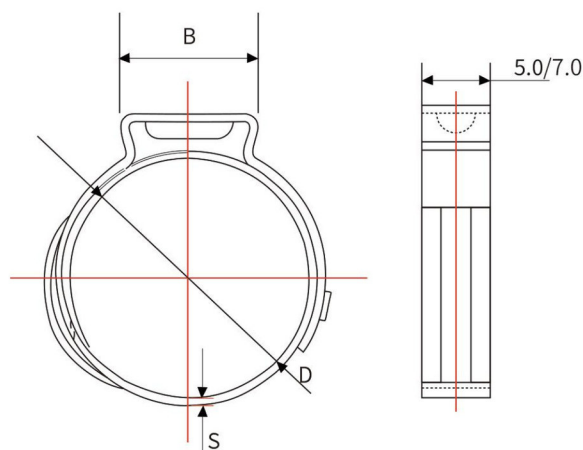

- ★ 360° seal on the hose
- ★ Quick installation
- ★ Low profile for tight spaces
- ★ Burr-free band edge
- ★ Cost effective, and simple alternative to worm drive hose clips
- ★ Suitable for definitive fixation of connecting pipes
- ★ To be assembled with simple ear clip pliers
- ★ Applications
 - Automotive aftermarket
 - White goods industry
 - Food and beverage industry
 - Hydromassage industry


Tips:

- ★ W4-All the parts are SS304

Size (mm)	Bandwidth (mm)	Thickness (mm)	Ear Width (mm)
5.2-6.5	5	0.5	4.1
5.7-7.0	5	0.5	4.1
6.2-7.5	5	0.5	4.1
6.7-8.0	5	0.5	4.1
7.0-8.7	5	0.5	5.35
7.3-9.0	5	0.5	5.35
7.8-9.5	5	0.5	5.35
8.3-10.5	5	0.5	5.35
9.2-10.9	5	0.5	5.35
9.6-11.3	5	0.5	5.35
10.1-11.8	5	0.5	5.35
9.4-11.9	7	0.6	8
9.8-12.3	7	0.6	8
10.3-12.8	7	0.6	8
10.8-13.3	7	0.6	8
11.3-13.8	7	0.6	8
11.5-14.0	7	0.6	8
12.0-14.5	7	0.6	8
12.3-14.8	7	0.6	8
12.8-15.3	7	0.6	8
13.2-15.7	7	0.6	8
13.7-16.2	7	0.6	8
14.1-16.6	7	0.6	8
14.3-16.8	7	0.6	8
14.5-17.0	7	0.6	8
15.0-17.5	7	0.6	8
14.6-17.8	7	0.6	8
15.5-18.5	7	0.6	9
16.2-19.2	7	0.6	9
16.8-19.8	7	0.6	9
18.0-21.0	7	0.6	9
19.6-22.6	7	0.6	9
20.5-23.5	7	0.6	9

Adjustable Ear Clip

Material:W1/W4

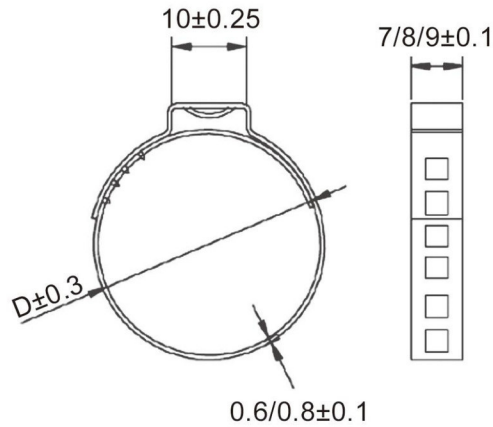

- ★ Clamps can be adjusted to several diameters
- ★ Fast and easy installation
- ★ Robust clamping due to 3 locking teeth
- ★ Applications
 - Automotive application-to clamp rubber boots onto drive shafts

Size (mm)	Bandwidth (mm)	Thickness (mm)	Ear Width (mm)
10-32	7/8/9	0.6/0.8	10
20-40	7/8/9	0.6/0.8	10
25-45	7/8/9	0.6/0.8	10
30-50	7/8/9	0.6/0.8	10
35-55	7/8/9	0.6/0.8	10
40-60	7/8/9	0.6/0.8	10
45-65	7/8/9	0.6/0.8	10
50-70	7/8/9	0.6/0.8	10
55-75	7/8/9	0.6/0.8	10
60-80	7/8/9	0.6/0.8	10
65-85	7/8/9	0.6/0.8	10
70-90	7/8/9	0.6/0.8	10
75-95	7/8/9	0.6/0.8	10
80-100	7/8/9	0.6/0.8	10
85-105	7/8/9	0.6/0.8	10
90-110	7/8/9	0.6/0.8	10
100-120	7/8/9	0.6/0.8	10
110-130	7/8/9	0.6/0.8	10
120-140	7/8/9	0.6/0.8	10
130-150	7/8/9	0.6/0.8	10

Note:


According to the requirement of customers, other sizes and material are also available

Tips:

- ★ W1-All the parts are Carbon steel and zinc plated
- ★ W4-All the parts are SS200 or SS300 series

Double Ear Hose Clip

Material:W1/W4

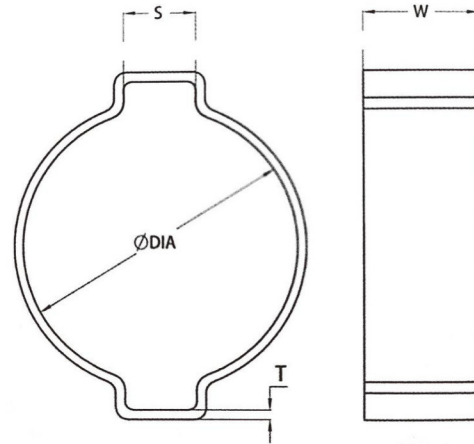

- ★ Ear clip double has no screw
- ★ The assembly is fast,simple and safe thanks to the pinching of the ears
- ★ The two ears enable a better and more constant sealing force
- ★ The tightening force is improved
- ★ Cost effective,and simple alternative to worm drive hose clips
 - Fast and easy to install
 - Ideal in narrow spaces
 - Suitable for definitive fixation of connecting pipes
 - To be assembled with simple ear clip pliers
 - Extended clamping range
- ★ Applications
 - For hoses that convey compressed air or fluid
 - Original equipment manufacturing
 - Maintenance repair and overhaul

Size (mm)	Bandwidth(mm)	Thickness(mm)	Bandwidth(mm)	Thickness(mm)
	W1		W4	
5-7	7.0	0.7	7.0	0.6
7-9	7.0	0.7	7.0	0.6
9-11	7.0	0.9	7.0	1.0
11-13	7.0	1.0	7.0	1.0
13-15	7.5	1.0	7.0	1.0
14-17	7.5	1.2	7.0	1.0
15-18	7.5	1.2	7.5	1.0
17-20	7.5	1.2	7.5	1.0
20-23	9.0	1.3	8.0	1.0
22-25	9.0	1.3	8.0	1.0
23-27	9.0	1.4	8.5	1.0
25-28	9.0	1.4	9.0	1.0
28-31	9.5	1.4	10.0	1.0
31-34	9.5	1.4	10.0	1.0
34-37	9.5	1.5	10.0	1.0
37-40	9.5	1.5	10.0	1.0

Note:


According to the requirement of customers,other sizes and material are also available

Tips:

- ★ W1- Carbon steel
- ★ W4- SS304

Mini Hose Clip

Material:W1/W2/W4

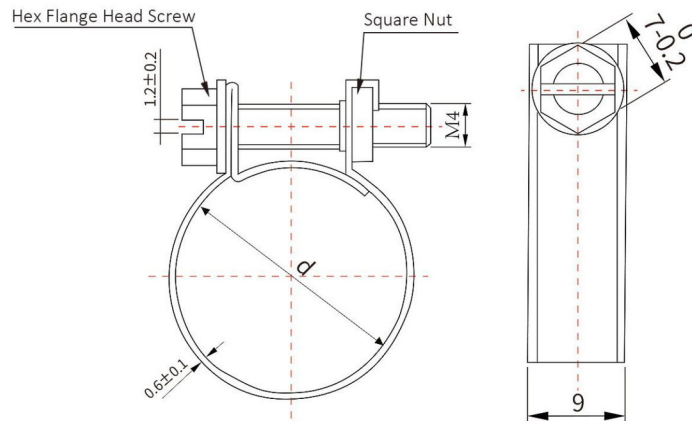

- ★ Mini Standard clamp is particularly suitable for use on small, thin-walled hoses
- ★ This little clamp provides an excellent clamping force well over screwless clamps
- ★ Applications
 - For small thin-walled hoses
 - Joining lines in machine building applications
 - Lines in the household appliance industry

Size (mm)	Bandwidth (mm)	Thickness (mm)
6-8	9	0.6
7-9	9	0.6
8-10	9	0.6
9-11	9	0.6
10-12	9	0.6
11-13	9	0.6
12-14	9	0.6
13-15	9	0.6
14-16	9	0.6
15-17	9	0.6
16-18	9	0.6
17-19	9	0.6
18-20	9	0.6
19-21	9	0.6
20-22	9	0.6
21-23	9	0.6
22-24	9	0.6
23-25	9	0.6
24-26	9	0.6
25-27	9	0.6
26-28	9	0.6
27-29	9	0.6
28-30	9	0.6
29-31	9	0.6
30-32	9	0.6
31-33	9	0.6
32-34	9	0.6

Tips:


- ★ W1-All the parts are carbon steel
- ★ W2-Band is SS304, screw is carbon steel
- ★ W4-All the parts are SS304

Note:

According to the requirement of customers, other sizes and material are also available

Tiger Spiral (Left & Right Hand) Pipe Clamp

Material: W1

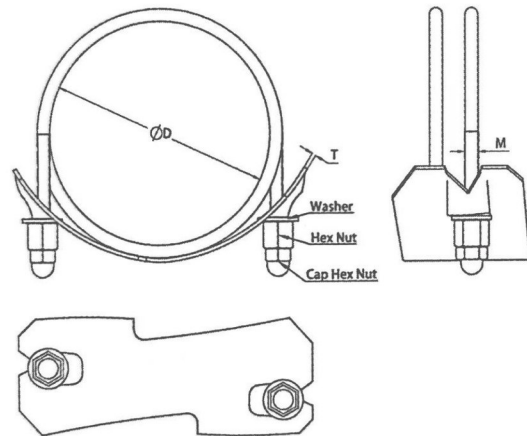

- ★ Spiral clip (clockwise/counterclockwise) winding
- ★ Heavy Duty Plated Steel Screw Clamps
- ★ Mainly for bellows hose
- ★ Applications:
 - Agricultural
 - Construction
 - Material handling industries


Inch size	Specification (mm)	Wire thickness (mm)	Steel plate thickness (mm)	Nut
1	28-34	4.3	1.5	M5
1.2	34-40	4.3	1.5	M5
1.5	44-50	4.3	1.5	M5
2	54-60	4.3	1.5	M5
2.2	67-73	4.3	1.5	M5
2.5	71-77	5.2	1.5	M6
2.75	79-85	5.2	1.5	M6
3	88-94	5.2	1.5	M6
3.5	95-102	5.2	1.5	M6
4	108-116	7	2.0	M8
4.5	122-130	7	2.0	M8
5	134-141	7	2.0	M8
5.5	147-155	7	2.0	M8
6	160-169	9	2.5	M10
6.5	179-188	9	2.5	M10
7	190-200	9	2.5	M10
7.5	200-210	9	2.5	M10
8	222-232	9	2.5	M10
8.5	230-240	9	2.5	M10
9	240-252	9	2.5	M10
9.5	268-280	9	2.5	M10
10	278-290	9	2.5	M10
10.5	295-305	9	2.5	M10
11	303-315	9	2.5	M10
11.5	313-325	9	2.5	M10
12	318-330	9	2.5	M10
13	338-350	9	2.5	M10
14	358-370	9	2.5	M10
15	392-405	9	2.5	M10
16	417-420	9	2.5	M10

Tips:

- ★ W1-All the parts are carbon steel

Pipe Bracket Clamp With Rubber

Material:W1

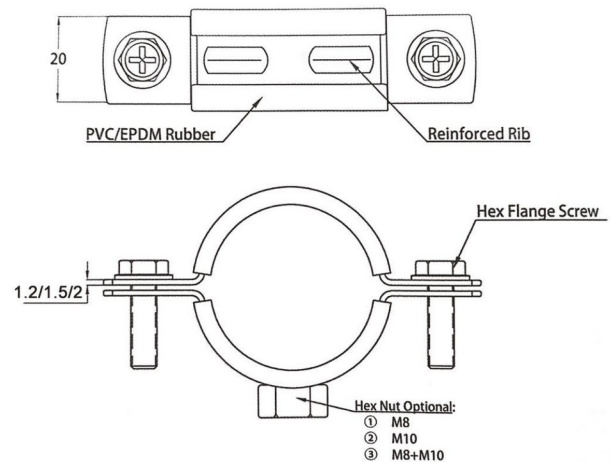

- ★ Made of zinc-plated iron or stainless steel, sturdy and durable
- ★ It is designed to support pipes or rods
- ★ Easy to install, can be installed on the wall or ceiling
- ★ Applications
 - Agricultural and building machines
 - Railway
 - Construction industry

Size (mm)	Inch Size	Welded Nut	Bandwidth*Thickness (mm)	Side Screw
15-19	3/8"	M8/M10/M8+M10	20*1.2/1.5/2.0	M6
20-25	1/2"	M8/M10/M8+M10	20*1.2/1.5/2.0	M6
26-30	3/4"	M8/M10/M8+M10	20*1.2/1.5/2.0	M6
32-36	1"	M8/M10/M8+M10	20*1.2/1.5/2.0	M6
38-43	1-1/4"	M8/M10/M8+M10	20*1.2/1.5/2.0	M6
47-51	1-1/2"	M8/M10/M8+M10	20*1.2/1.5/2.0	M6
53-58		M8/M10/M8+M10	20*1.2/1.5/2.0	M6
60-64	2"	M8/M10/M8+M10	20*1.2/1.5/2.0	M6
68-72		M8/M10/M8+M10	20*1.2/1.5/2.0	M6
75-80	2-1/2"	M8/M10/M8+M10	20*1.2/1.5/2.0	M6
71-86		M8/M10/M8+M10	20*1.2/1.5/2.0	M6
87-92	3"	M8/M10/M8+M10	20*1.2/1.5/2.0	M6
99-105	3-1/2"	M8/M10/M8+M10	20*1.2/1.5/2.0	M6
107-112		M8/M10/M8+M10	20*1.2/1.5/2.0	M6
113-118	4"	M8/M10/M8+M10	20*1.2/1.5/2.0	M6
125-130		M8/M10/M8+M10	20*1.2/1.5/2.0	M6
132-137		M8/M10/M8+M10	20*1.2/1.5/2.0	M6
138-142	5"	M8/M10/M8+M10	20*1.2/1.5/2.0	M6
148-152		M8/M10/M8+M10	20*1.2/1.5/2.0	M6
159-166	6"	M8/M10/M8+M10	20*1.2/1.5/2.0	M6
200-212		M8/M10/M8+M10	20*1.2/1.5/2.0	M6
215-220	8"	M8/M10/M8+M10	20*1.2/1.5/2.0	M6
248-252		M8/M10/M8+M10	20*1.2/1.5/2.0	M6

Tips:


- ★ W1-All the parts are carbon steel
- ★ W4-All the parts are SS200 or SS300 series
- ★ W5-All the parts are SS316

Note:

According to the requirement of customers, other sizes and material are also available

Stainless Steel Adjustable Bracket Pipe Clamp

Material:W4

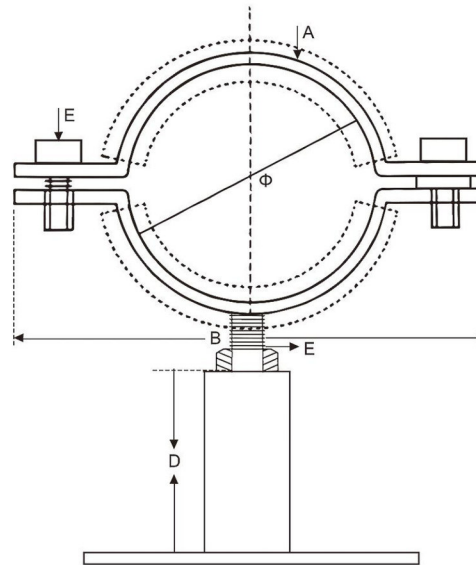

- ★ High temperature does not change color
strong corrosion resistance
- ★ The fast bracket with base is suitable for craftsmen
easy and quick to install
- ★ Reinforced welding of the screw rod and the clip
the welding is more reinforced
- ★ Application
 - Water pipe, gas pipe
 - Household
 - Agriculture
 - Construction

Size	Width A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
15-19	25	60	M8*50	50/100	M8*20
20-22	25	65	M8*50	50/100	M8*20
25-28	25	68	M8*50	50/100	M8*25
32-34	25	76	M8*50	50/100	M8*25
38-40	25	83	M8*50	50/100	M8*25
42-45	25	88	M8*50	50/100	M8*25
48-51	25	93	M8*50	50/100	M8*25
54-57	25	100	M8*50	50/100	M8*25
63-65	25	108	M8*50	50/100	M8*25
70-76	25	122	M8*50	50/100	M8*30
85-89	28	136	M8*50	50/100	M8*30
102-108	28	156	M8*50	50/100	M8*30
110-114	28	164	M8*50	50/100	M8*40

Note:


According to the requirement of customers, other sizes and material are also available

Tips:

- ★ S5304(screw is S5201, can also make S5304)

Adjustable Lantern Hanger Pipe Clamp

Material:W1

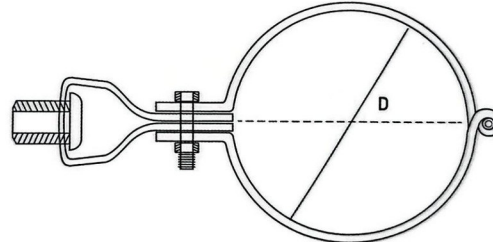

- ★ Matching connecting screws and hanging heads complete accessories
- ★ Galvanized surface, strong anti-oxidation and anti-rust ability
- ★ One-piece galvanized steel sheet for fixing various pipes
- ★ Application
 - Industrial transport fixed
 - External wall pipe fixing
 - Car ship
 - Equipment
 - Solid wood furniture reinforcement
 - Kitchen faucet filter


Tips:

- ★ W1-All the parts are carbon steel and zinc plated

Inch Size	D(mm)	Thickness*Width(mm)
1/2"	22	1.4*21
3/4"	27	1.4*21
1"	34	1.4*21
1 1/5"	40	1.4*21
1 1/2"	50	1.4*21
2"	60	1.8*21
2 1/2"	76	1.8*21
3"	89	1.8*21
4"	114	1.8*21
5"	133	1.8*21
6"	165	1.8*21
8"	219	2.0*28
10"	273	2.0*28
12"	325	2.0*28

Strut Channel Clamp

Material:W1/W4/W5

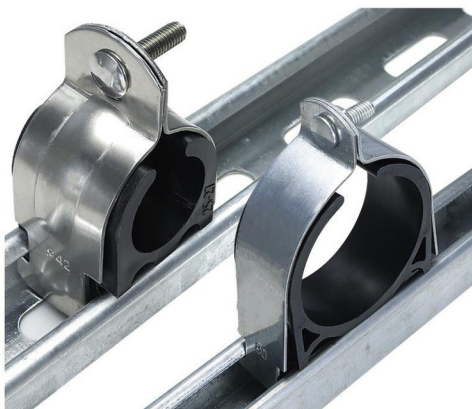


Tips:

- ★ W1-All the parts are carbon steel
- ★ W4-All the parts are SS200 or SS300 series
- ★ W5-All the parts are SS316

Inch Size	Bandwidth (mm)	Thickness (mm)	Bolt
1/2"	32	1.7	M6*32
3/4"	32	1.7	M6*32
1"	32	1.7	M6*32
1-1/4"	32	2.0	M6*32
1-1/2"	32	2.0	M6*32
2"	32	2.0	M6*32
2-1/2"	32	2.0	M6*32
3"	32	2.5	M6*32
4"	32	2.5	M6*32
5"	32	2.5	M6*32
6"	32	2.5	M6*32
8"	32	2.5	M6*32
10"	32	2.5	M6*32
12"	32	2.5	M6*32

U Bolt Muffler Clamp

Material:W1/W4/W5

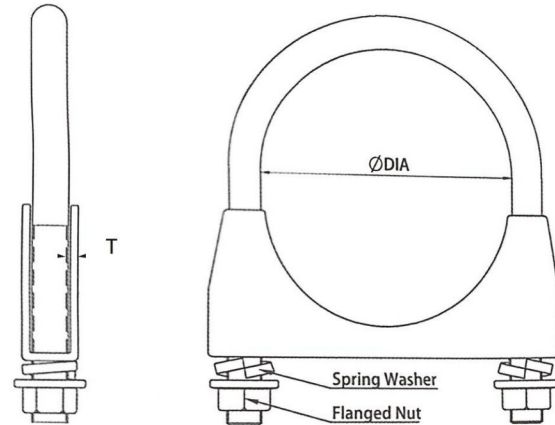

- ★ Sturdy and durable with high hardness
- ★ The screw section is smooth and flat,without residual burrs
- ★ Good corrosion resistance,environmental protection material
- ★ U bolt exhaust clamp complete with nuts
- ★ Variety of uses for exhausts,TV ariels,framing fasteners and anchors
- ★ Applications
 - Automotive
 - General purpose use

Size (mm)	Bolt	Height (mm)	Thickness (mm)
24	M8	52	2
25	M8	53	2
28	M8	55	2
32	M8	60	2
35	M8	63	2
38	M8	66	2
42	M8	70	2
45	M8	73	2
48	M8	76	2
51	M8	78	2
54	M8	82	2
57	M8	85	2
60	M8	88	2
64	M8	92	2
67	M8	95	2
70	M8	98	2
73	M8	100	2
76	M8	104	2
83	M8	111	2
89	M8	116	2
95	M8	122	2
102	M8	130	2

Note:

According to the requirement of customers,other sizes and material are also available

Tips:

- ★ W1-All the parts are carbon steel
- ★ W4-All the parts are SS200 or SS300 series
- ★ W5-All the parts are SS316

V Band Clamp With Flanges

Material:W4



Inch Size	Material	Bandwidth (mm)	Thickness (mm)
1.75"	SS304	19	1.2
2.0"	SS304	19	1.2
2.25"	SS304	19	1.2
2.35"	SS304	19	1.2
2.5"	SS304	22	1.2
2.75"	SS304	22	1.2
3.0"	SS304	22	1.2
3.25"	SS304	22	1.2
3.5"	SS304	22	1.2
4.0"	SS304	22	1.2
4.5"	SS304	22	1.2
5"	SS304	22	1.2
5.5"	SS304	22	1.2
6"	SS304	22	1.2

Tips:

★ W4-all the parts are SS304

Note:

According to the requirement of customers,other sizes and material are also available

Quick Release V Band Clamp With Flanges

Material:W4



Inch Size	Material	Bandwidth (mm)	Thickness (mm)
1.75"	SS304	19	1.2
2.0"	SS304	19	1.2
2.25"	SS304	19	1.2
2.35"	SS304	19	1.2
2.5"	SS304	22	1.2
2.75"	SS304	22	1.2
3.0"	SS304	22	1.2
3.25"	SS304	22	1.2
3.5"	SS304	22	1.2
4.0"	SS304	22	1.2
4.5"	SS304	22	1.2
5"	SS304	22	1.2
5.5"	SS304	22	1.2
6"	SS304	22	1.2

Tips:


★ W4-all the parts are SS304

Note:

According to the requirement of customers,other sizes and material are also available

V Band Pipe Clamp

Material:W2/W4

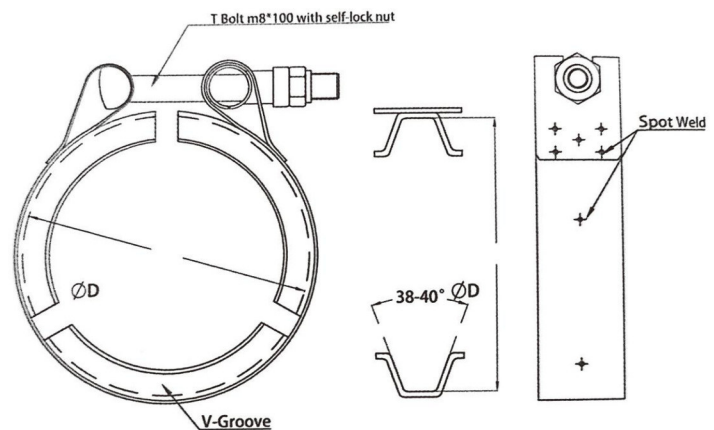

-
- ★ V band clamp is mainly used for flange connection and fixation, automobile exhaust pipe
 - ★ Turbocharger inlet and exhaust pipe etc
 - ★ V band has large torque, usually its main material is made of stainless steel
 - ★ Application
 - Diesel engines
 - Turbochargers
 - Heavy duty exhaust systems
-

Inch Size	Bandwidth (mm)	Thickness (mm)	Bolt
2"	14	1.0	M6
2.75"	14	1.0	M6
3"	19	1.2	M6
3.5"	19	1.2	M6
4"	19	1.2	M6
4.5"	19	1.2	M6
5"	19	1.2	M6
6"	19	1.2	M6

Note:

According to the requirement of customers, other sizes and material are also available

Tips:

- ★ W2 -Band and V groove are SS200 or SS300 series, others are carbon steel
- ★ W4 -All the parts are SS200 or SS300 series

Aluminum HD V Band Clamp

Material:Aluminium



(Quick release)



(Classical type)

-
- ★ Burst pressure rating of 800psi,with stands up to 400°F
 - ★ For turbo exhaust downpipes piping
 - ★ These aluminium clamp flange are designed for welding to your pipes and clamping exhaust components together,and together with the aluminum quick release clamp
 - ★ Ideal for race applications with highly advanced pressurized air applications and turbo intake charge piping,while the traditional vanjen clamp is great for everyday street applications
-

Inch Size	Material	Weight
2"	Aluminium	0.30
2.5"	Aluminium	0.33
2.75"	Aluminium	0.35
3"	Aluminium	0.35
3.5"	Aluminium	0.37
4"	Aluminium	0.42
5"	Aluminium	0.50

Note:


According to the requirement of customers,other sizes and material are also available

Tips:

- ★ All the parts are aluminium
- ★ Flanges is aluminum,can also make SS304

Mangote Pipe Clamp

Material:W1

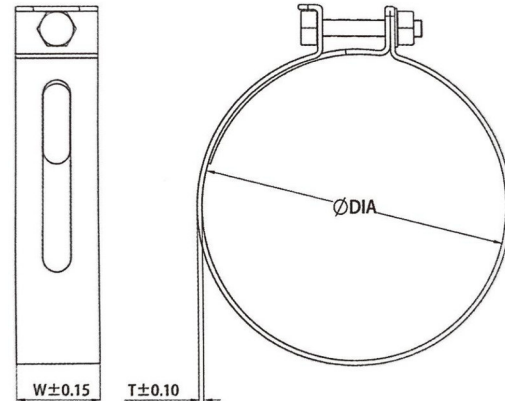

- ★ The clamps on this line have a high torque capacity
- ★ Indicated for heavy duty on tubes and hoses of rigid material
- ★ Applications
 - Industrial and household
 - Automotive and agriculture
 - Also suitable for heavy duty hoses or rigid material pipes and PVC hoses

Size (mm)	Bandwidth (mm)	Thickness (mm)
35-40	20	1.2
39-47	20	1.2
48-56	20	1.2
54-62	20	1.2
61-69	20	1.2
67-75	20	1.2
73-81	20	1.2
79-87	20	1.2
86-94	20	1.2
105-117	20	1.2
29-32	32	1.5
35-40	32	1.5
39-47	32	1.5
48-56	32	1.5
54-62	32	1.5
61-69	32	1.5
67-75	32	1.5
73-81	32	1.5
79-87	32	1.5
86-94	32	1.5
92-100	32	1.5
99-107	32	1.5
105-117	32	1.5
111-123	32	1.5
117-129	32	1.5
130-142	32	1.5
137-149	32	1.5
143-155	32	1.5
149-161	32	1.5
162-174	32	1.5
175-188	32	1.5
187-199	32	1.5
200-212	32	1.5

Tips:

- ★ W1-All the parts are carton steel

Quick Release Hose Clamp-3M Length

Material:W3/W4



Bandwidth (mm)	Thickness (mm)	Length (m)
9/12	0.6	3

Note:

According to the requirement of customers,other sizes and material are also available

30M Roll Quick Release Hose Clamp

Material:W3/W4




Bandwidth (mm)	Thickness (mm)	Length (m)
9/12	0.6	30

Note:

According to the requirement of customers,other sizes and material are also available

Quick Release Hose Clamp

Material:W3/W4

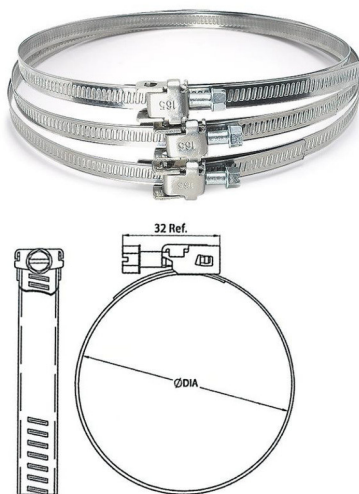

Size (mm)	Bandwidth (mm)	Thickness (mm)
90	9/12	0.6
100	9/12	0.6
125	9/12	0.6
135	9/12	0.6
165	9/12	0.6
175	9/12	0.6
180	9/12	0.6
215	9/12	0.6
225	9/12	0.6
240	9/12	0.6
260	9/12	0.6
270	9/12	0.6
280	9/12	0.6
290	9/12	0.6
300	9/12	0.6
325	9/12	0.6
380	9/12	0.6

Tips:

- ★ W3-Band is SS430, housing and screw are carbon steel
- ★ W4-All the parts are SS304

Note:

According to the requirement of customers,other sizes and material are also available

Worm Drive Quick Release Hose Clamp

Material:W4



Tips:

★ W4-All the parts are SS304

Size (mm)	Bandwidth (mm)	Thickness (mm)
90	12.7/14.2	0.6
100	12.7/14.2	0.6
125	12.7/14.2	0.6
135	12.7/14.2	0.6
165	12.7/14.2	0.6
175	12.7/14.2	0.6
180	12.7/14.2	0.6
215	12.7/14.2	0.6
225	12.7/14.2	0.6
240	12.7/14.2	0.6
260	12.7/14.2	0.6
270	12.7/14.2	0.6
280	12.7/14.2	0.6
290	12.7/14.2	0.6
300	12.7/14.2	0.6
325	12.7/14.2	0.6
380	12.7/14.2	0.6
400	12.7/14.2	0.6

DIY Adjustable Custom Hose Clamp

Material:W4



Bandwidth (mm)	Thickness (mm)	Length (m)
8	0.6	3/30/50
12.7	0.6	3/30/50
14.2	0.6	3/30/50

Note:

According to the requirement of customers,other sizes and material are also available

Tips:

★ W4-All the parts are SS304

Worm Drive Square Hose Clamp

Material:W4



Tips:

★ W4-All the parts are SS201 Or SS304

Size (mm)	Bandwidth (mm)	Thickness (mm)
14-27	12.7	0.6
18-32	12.7	0.6
21-38	12.7	0.6
21-44	12.7	0.6
27-51	12.7	0.6
33-57	12.7	0.6
40-63	12.7	0.6
46-70	12.7	0.6
52-76	12.7	0.6
59-82	12.7	0.6
65-89	12.7	0.6
72-95	12.7	0.6
78-101	12.7	0.6
84-108	12.7	0.6
91-114	12.7	0.6
105-127	12.7	0.6
118-140	12.7	0.6
130-152	12.7	0.6

Worm Drive Straight Strap Clamp

Material:W4



Tips:

★ W4-All the parts are SS201 Or SS304


Length	Thread length	Bandwidth (mm)	Thickness (mm)
As request	As request	12	0.6

Note:

According to the requirement of customers,other sizes and material are also available

Stainless Steel Self-locking Cable Tie

Material:W4/W5

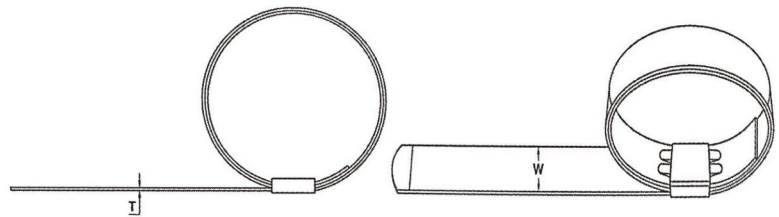

- ★ Built-in frosted steel ball, non-returnable design, firm and tight, not easy to release
- ★ No burrs, smooth and does not hurt hands
- ★ Made of stainless steel, strong corrosion resistance

Material	Spec1	Spec2	Spec3	Spec4	Spec5
	Width * Length (mm)				
SS201/SS304/SS316	4.6*100	8*100	10*150	12*150	16*250
SS201/SS304/SS316	4.6*150	8*150	10*200	12*200	16*300
SS201/SS304/SS316	4.6*200	8*175	10*250	12*250	16*350
SS201/SS304/SS316	4.6*250	8*200	10*300	12*300	16*400
SS201/SS304/SS316	4.6*300	8*250	10*350	12*350	16*450
SS201/SS304/SS316	4.6*350	8*300	10*400	12*400	16*500
SS201/SS304/SS316	4.6*400	8*350	10*450	12*450	16*550
SS201/SS304/SS316	4.6*450	8*400	10*500	12*500	16*600
SS201/SS304/SS316	4.6*500	8*450	10*550	12*550	16*650
SS201/SS304/SS316	4.6*550	8*500	10*600	12*600	16*700
SS201/SS304/SS316	4.6*600	8*550	10*650	12*650	16*750
SS201/SS304/SS316	4.6*650	8*600	10*700	12*700	16*800
SS201/SS304/SS316	4.6*700	8*650	10*750	12*750	16*850
SS201/SS304/SS316	4.6*750	8*700	10*800	12*800	16*900
SS201/SS304/SS316	4.6*800	8*750	10*850	12*850	16*950
SS201/SS304/SS316	4.6*850	8*800	10*900	12*900	16*1000
SS201/SS304/SS316	4.6*900	8*850	10*950	12*950	16*1050
SS201/SS304/SS316	4.6*950	8*900	10*1000	12*1000	16*1100
SS201/SS304/SS316	4.6*1000	8*950	10*1050	12*1050	16*1200
SS201/SS304/SS316	4.6*1050	8*1000	10*1100	12*1100	16*1300
SS201/SS304/SS316	4.6*1100	8*1050	10*1200	12*1200	16*1400
SS201/SS304/SS316	4.6*1200	8*1100	10*1300	12*1300	16*1500
SS201/SS304/SS316	4.6*1300	8*1200	10*1400	12*1400	/
SS201/SS304/SS316	4.6*1400	8*1300	10*1500	12*1500	/
SS201/SS304/SS316	4.6*1500	8*1400	/	/	/
SS201/SS304/SS316	/	8*1500	/	/	/

Tips:

- ★ W4-All the parts are SS201 Or SS304
- ★ W5-All the parts are SS316

British Type Bridge Hose Clamp

Material:W2/W4/W5



Tips:

- ★ W2-Band and housing are SS200 or SS300 series,screw is carbon steel
- ★ W4-All the parts are SS200 or SS300 series
- ★ W5-All the parts are SS316

Size (mm)	Bandwidth (mm)	Thickness (mm)
30-50	9	0.8
40-60	9	0.8
50-70	9	0.8
60-80	9	0.8
70-90	9	0.8
80-100	9	0.8
90-110	9	0.8
100-120	9	0.8
110-130	9	0.8
120-140	9	0.8
130-150	9	0.8
140-160	9	0.8
150-170	9	0.8
160-180	9	0.8
170-190	9	0.8
180-200	9	0.8
190-210	9	0.8
200-220	9	0.8

German Type Bridge Hose Clamp

Material:W2/W4/W5




Tips:

- ★ W2-Band and housing are SS200 or SS300 series,screw is carbon steel
- ★ W4-All the parts are SS200 or SS300 series
- ★ W5-All the parts are SS316

Size (mm)	Bandwidth (mm)	Thickness (mm)
30-50	9/12	0.6
40-60	9/12	0.6
50-70	9/12	0.6
60-80	9/12	0.6
70-90	9/12	0.6
80-100	9/12	0.6
90-110	9/12	0.6
100-120	9/12	0.6
110-130	9/12	0.6
120-140	9/12	0.6
130-150	9/12	0.6
140-160	9/12	0.6
150-170	9/12	0.6
160-180	9/12	0.6
170-190	9/12	0.6
180-200	9/12	0.6
190-210	9/12	0.6
200-220	9/12	0.6

Stainless Steel Saddle Clamp

Material:W4

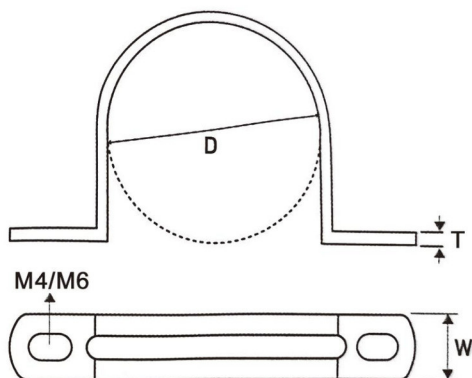

Size (mm)	Bandwidth (mm)	Thickness (mm)	Hole Size
5	12	0.6	M4
8	12	0.6	M4
10	12	0.6	M4
12	12	0.6	M4
14	12	0.6	M4
16	18	0.6	M6
18	18	0.6	M6
20	18	0.6	M6
22	18	0.6	M6
25	18	0.6	M6
27	18	0.6	M6
30	18	0.6	M6
32	18	0.6	M6
35	18	0.6	M6
40	18	0.6	M6
42	18	0.6	M6
45	18	0.6	M6
50	18	0.6	M6
60	18	0.6	M6
63	18	0.6	M6
65	18	0.6	M6
70	18	0.6	M6
75	18	0.6	M6
80	18	0.6	M6
90	18	0.6	M6
100	18	0.6	M6
110	18	0.6	M6
120	18	0.6	M6
130	18	0.6	M6
140	18	0.6	M6
150	18	0.6	M6
160	18	0.6	M6
170	18	0.6	M6
200	18	0.6	M6

Note:

According to the requirement of customers, other sizes and material are also available

Tips:

★ W4-All the parts are SS201 Or SS304

Stainless Steel Thickened Saddle Clamp

Material:W4



Size (mm)	Bandwidth (mm)	Thickness (mm)	Hole Size
8	14	1.5	M6
10	14	1.5	M6
12	14	1.5	M6
14	14	1.5	M6
16	19	1.5	M8
18	19	1.5	M8
20	19	1.5	M8
22	19	1.5	M8
25	19	1.5	M8
27	19	1.5	M8
30	19	1.5	M8
32	19	1.5	M8
35	19	1.5	M8
40	19	1.5	M8
42	19	2.0	M8
45	19	2.0	M8
50	19	2.0	M8
57	19	2.0	M8
60	19	2.0	M8
63	19	2.0	M8
76	19	2.0	M8
80	19	2.0	M8
89	19	2.0	M8
102	19	2.0	M8
108	19	2.0	M8
114	19	2.0	M8
130	19	2.0	M8
140	19	2.0	M8
150	19	2.0	M8
160	19	2.0	M8
170	19	2.0	M8
180	19	2.0	M8
190	19	2.0	M8
200	19	2.0	M8

Note:


According to the requirement of customers, other sizes and material are also available

Tips:

★ W4-All the parts are SS201 Or SS304

Double U Clamp

Material:W1/W4

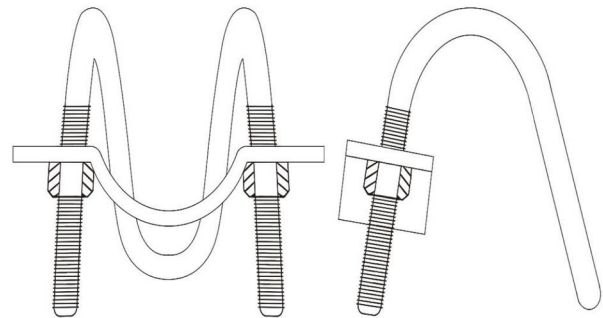

- ★ The U-shaped steel plate is stamped and formed in one step
- ★ Better fastening, strong and durable
- ★ Multiple models available, complete specifications
- ★ The product is smooth, burr-free and of excellent workmanship
- ★ The threads are neat and clear, and the force is even and not easy to slip
- ★ Applications
 - Industrial building
 - Greenhouse
 - Livestock breeding equipment
 - General purpose use

Material	Screw size	Pipe OD (mm)	Pipe OD (mm)
W1/W4	M8	20	20
W1/W4	M8	20	25
W1/W4	M8	25	25
W1/W4	M8	32	20
W1/W4	M8	32	25
W1/W4	M8	32	32
W1/W4	M8	50	50
W1/W4	M8	50	25
W1/W4	M8	50	32

Note:


According to the requirement of customers, other sizes and material are also available

Tips:

- ★ W1-All the parts are carbon steel
- ★ W4-All the parts are SS200 or SS300 series

Single U Clamp

Material:W1/W4

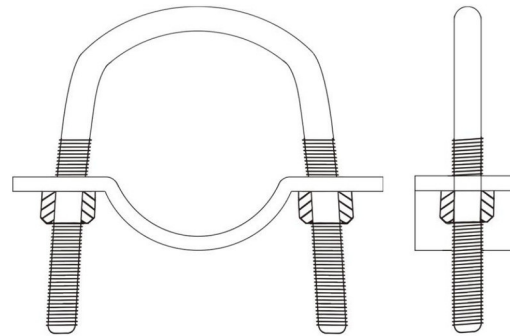

- ★ The U-shaped steel plate is stamped and formed in one step
- ★ Better fastening, strong and durable
- ★ Multiple models available, complete specifications
- ★ The product is smooth, burr-free and of excellent workmanship
- ★ The threads are neat and clear, and the force is even and not easy to slip
- ★ Applications
 - Industrial building
 - Greenhouse
 - Livestock breeding equipment
 - General purpose use

Material	Screw size	Pipe OD (mm)	Pipe OD (mm)
W1/W4	M8	20	20
W1/W4	M8	20	25
W1/W4	M8	25	25
W1/W4	M8	32	20
W1/W4	M8	32	25
W1/W4	M8	32	32
W1/W4	M8	50	50
W1/W4	M8	50	25
W1/W4	M8	50	32

Note:

According to the requirement of customers, other sizes and material are also available

Tips:

- ★ W1-All the parts are carbon steel
- ★ W4-All the parts are SS200 or SS300 series

Ratchet Tie Down/Strap



- ★ Inelastic, low water absorption, strong adaptability not easy to break
- ★ Double-row hooks are not easy to fall off
- ★ Simple operation saves time and effort
- ★ Widely used in ships, machinery, ports, transportation electric power, engineering, construction and other industries

Size	Width (mm)	Size	Width (mm)	Size	Width (mm)
0.8T*3M	25	2T*3M	38	2T*3M	50
0.8T*4M	25	2T*4M	38	2T*4M	50
0.8T*5M	25	2T*5M	38	2T*5M	50
0.8T*6M	25	2T*6M	38	2T*6M	50
0.8T*8M	25	2T*8M	38	2T*8M	50
0.8T*9M	25	2T*9M	38	2T*9M	50
0.8T*10M	25	2T*10M	38	2T*10M	50
0.8T*12M	25	2T*12M	38	2T*12M	50
0.8T*14M	25	2T*14M	38	2T*14M	50
3T*3M	50	8T*3M	75	10T*3M	75
3T*4M	50	8T*4M	75	10T*4M	75
3T*5M	50	8T*5M	75	10T*5M	75
3T*6M	50	8T*6M	75	10T*6M	75
3T*8M	50	8T*8M	75	10T*8M	75
3T*9M	50	8T*9M	75	10T*9M	75
3T*10M	50	8T*10M	75	10T*10M	75
3T*12M	50	8T*12M	75	10T*12M	75
3T*14M	50	8T*14M	75	10T*14M	75
5T*3M	50	8T*3M	100	10T*3M	100
5T*4M	50	8T*4M	100	10T*4M	100
5T*5M	50	8T*5M	100	10T*5M	100
5T*6M	50	8T*6M	100	10T*6M	100
5T*8M	50	8T*8M	100	10T*8M	100
5T*9M	50	8T*9M	100	10T*9M	100
5T*10M	50	8T*10M	100	10T*10M	100
5T*12M	50	8T*12M	100	10T*12M	100
5T*14M	50	8T*14M	100	10T*14M	100

Note:

According to the requirement of customers, other sizes and material are also available

Tips:

- ★ Strap material: PP or PE
- ★ Hook: S or double J hook
- ★ Ratchet material: carbon steel or stainless steel
- ★ Handle material: aluminum; carbon steel; stainless steel
- ★ Strap color: orange, blue, green or as client needs

Auto Retractable Ratchet Tie Down



Size (width*length)	Working load tension/Break load tension
Strap: PES 25mm*3.5m	TUV/G
Hook:S/JJ	工作拉力/破断拉力
TUV/GS 12195-2	320kg/640kg
Strap: PES 50mm*4.5m	TUV/G
Hook:S/JJ	工作拉力/破断拉力
TUV/GS 12195-2	750kg/1500kg
Strap: PES 38mm*4m	TUV/G
Hook:S/JJ	工作拉力/破断拉力
TUV/GS 12195-2	500kg/1000kg
Strap: PES 18mm*2m	TUV/G
Hook:S/JJ	工作拉力/破断拉力
TUV/GS 12195-2	100kg/200kg

Note:

According to the requirement of customers, other sizes and material are also available


Tips:

- ★ Strap material: PP or PE
- ★ Hook: S or double J hook
- ★ Ratchet material: carbon steel
- ★ Strap color: orange, Black, red, green or as client needs

★ New Products ★



★ Application Area ★

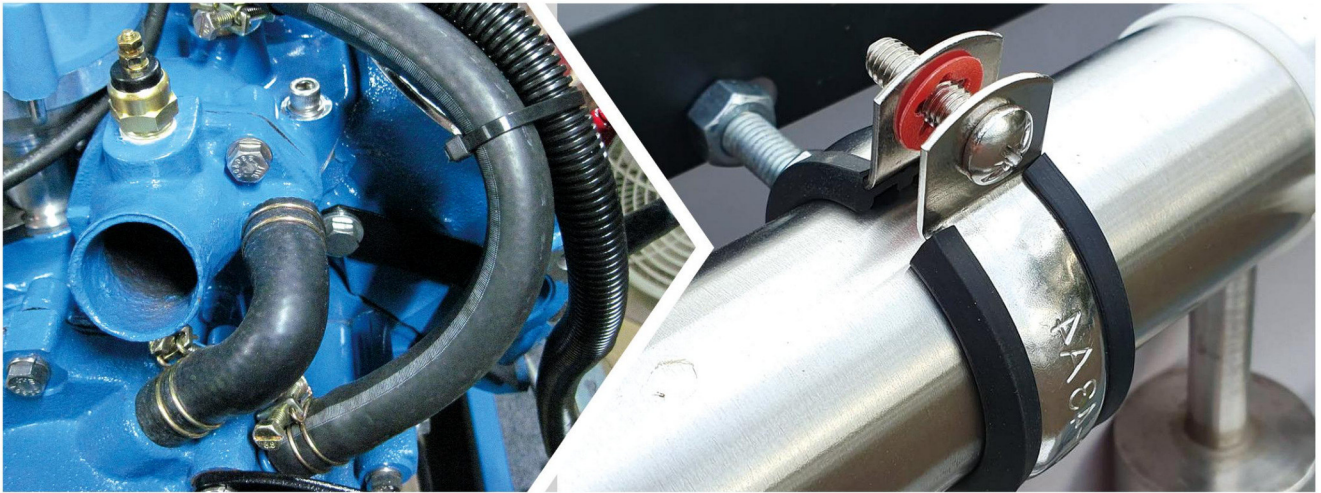

OEM & SOURCING SUPPORT

Use the catalog as a technical starting point, then confirm project-specific requirements with DISLAB PRECISION.



DIMENSION REVIEW

Confirm range, band width, thickness and hardware details.

MATERIAL OPTIONS

Discuss steel grade, finish and corrosion requirements.

PACKAGING

Coordinate labels, cartons, barcodes and consolidated packing.

GLOBAL PROJECTS

Prepare clear product data for international B2B purchasing.



INDUSTRIAL COMPONENTS FOR GLOBAL BUYERS

Standard products and project-specific sourcing support for hose clamps, pipe supports and industrial fastening hardware.

SEND WITH YOUR INQUIRY

- Product name or catalog page
- Required dimensions and material
- Quantity and packaging
- Drawing or sample photo for custom parts

dislabprecision.com

DISLAB PRECISION