


SINGLE BOLT HOSE CLAMP

Heavy-duty connection for reinforced hose systems


MATERIAL: W1 / W2 / W4 / W5



PRODUCT VIEW

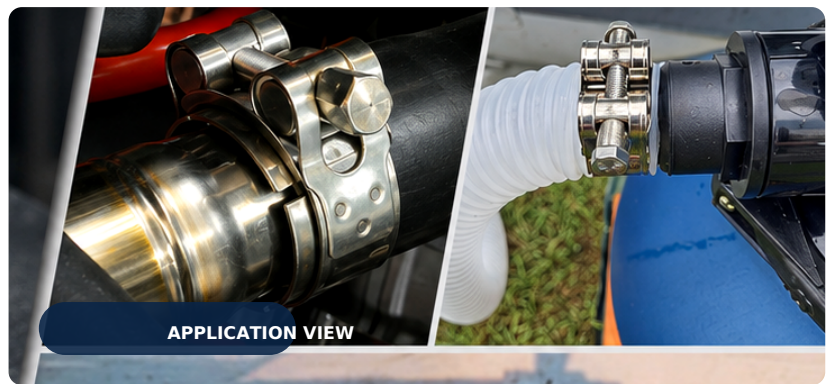

APPLICATION VIEW

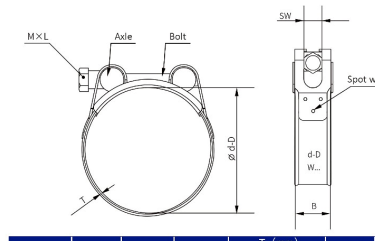

MATERIAL OPTIONS

- W1** Carbon steel
- W2** SS band / bridge
- W4** SS200 / SS300
- W5** SS316

CLAMP RANGE d-D (mm)	D (mm)	M x L (mm)	B (mm)	T-W1 (mm)	T-W2/W4 (mm)	SW (mm)	AD (Nm)
17-19	19	M5x40	18	0.6	0.6	8	4.5
20-22	22	M5x40	18	0.6	0.6	8	4.5
23-25	25	M5x40	18	0.6	0.6	8	4.5
26-28	28	M5x40	18	0.6	0.6	8	4.5
29-31	31	M6x50	20	0.8	0.6	8	4.5
32-35	35	M6x50	20	0.8	0.6	10	9
36-39	39	M6x50	20	0.8	0.6	10	9
40-43	43	M6x50	20	0.8	0.6	10	9
44-47	47	M6x55	22	1.2	0.8	10	9
48-51	51	M6x55	22	1.2	0.8	10	9
52-55	55	M6x55	22	1.2	0.8	10	9
56-59	59	M6x60	22	1.2	0.8	10	9
60-63	63	M6x60	22	1.2	0.8	10	9
64-67	67	M6x60	22	1.2	0.8	10	9
68-73	73	M8x70	24	1.5	0.8	13	18
74-79	79	M8x70	24	1.5	0.8	13	18
80-85	85	M8x70	24	1.5	0.8	13	18
86-91	91	M8x70	24	1.5	0.8	13	18
92-97	97	M8x70	24	1.5	0.8	13	18
98-103	103	M8x80	24	1.5	0.8	13	18
104-112	112	M8x80	24	1.5	0.8	13	18
113-121	121	M8x80	24	1.5	0.8	13	18
122-130	130	M8x80	24	1.5	0.8	13	18
131-139	139	M10x100	26	1.7	1.0	17	29
140-148	148	M10x100	26	1.7	1.0	17	29
149-161	161	M10x100	26	1.7	1.0	17	29
162-174	174	M10x100	26	1.7	1.0	17	29
175-187	187	M10x100	26	1.7	1.0	17	29
188-200	200	M10x100	26	1.7	1.0	17	29
201-213	213	M10x100	26	1.7	1.0	17	29
214-226	226	M10x100	26	1.7	1.0	17	29
227-239	239	M10x100	26	1.7	1.0	17	29
240-252	252	M10x100	26	1.7	1.0	17	29

All dimensions are in millimeters unless otherwise stated. Torque AD is shown in N.m.

PERFORMANCE

- Gentle on hose under high tightening force
- Withstands repeated mounting and dismounting
- Reliable functionality in severe conditions

TYPICAL APPLICATIONS

- Large / reinforced hoses
- Agriculture and irrigation
- Drainage systems and sludge suction