


GERMAN TYPE HOSE CLAMP - 12 MM

Heavy-duty non-perforated clamp with rolled edges, designed to DIN 3017


MATERIAL: W1 / W2 / W4 / W5



PRODUCT VIEW

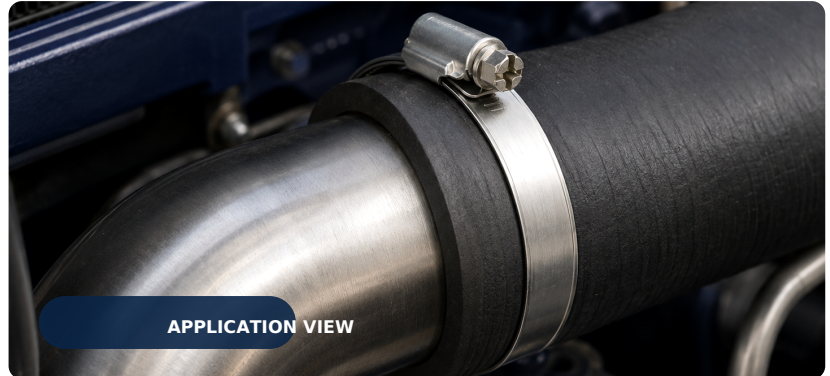

APPLICATION VIEW

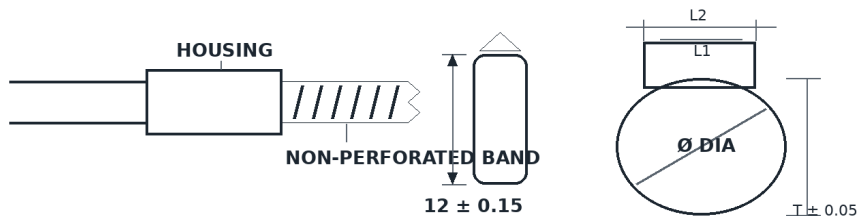

CONSTRUCTION

- 01** 12 mm band
- 02** Rolled edges
- 03** Non-perforated
- 04** DIN 3017

SIZE RANGE (mm)	BANDWIDTH (mm)	THICKNESS W1 (mm)	THICKNESS W2/W4/W5 (mm)
12-20	12	0.7	0.6
16-25	12	0.7	0.6
20-32	12	0.7	0.6
25-40	12	0.7	0.6
32-50	12	0.7	0.6
40-60	12	0.7	0.6
50-70	12	0.7	0.6
60-80	12	0.7	0.6
70-90	12	0.7	0.6
80-100	12	0.7	0.6
90-110	12	0.7	0.6
100-120	12	0.7	0.6
110-130	12	0.7	0.6
120-140	12	0.7	0.6
130-150	12	0.7	0.6
140-160	12	0.7	0.6
150-170	12	0.7	0.6
160-180	12	0.7	0.6
170-190	12	0.7	0.6
180-200	12	0.7	0.6
190-210	12	0.7	0.6
200-220	12	0.7	0.6
210-230	12	0.7	0.6
220-240	12	0.7	0.6
230-250	12	0.7	0.6
240-260	12	0.7	0.6
250-270	12	0.7	0.6
260-280	12	0.7	0.6
270-290	12	0.7	0.6
280-300	12	0.7	0.6

All dimensions are in millimeters. Larger diameters are available on request.

MATERIAL OPTIONS

- W1 All parts: carbon steel
- W2 SS200/SS300 band and housing; carbon steel screw
- W4 All parts: SS200 or SS300 series
- W5 All parts: SS316

TYPICAL APPLICATIONS

- Cooling water, fuel and ventilation lines
- Oil lines and sanitary pipe connections
- Machine building and household appliances
- Commercial vehicle hose systems