

PARTIAL HEAD GERMAN TYPE HOSE CLAMP



Asymmetric partial housing for high torque and even clamping pressure

MATERIAL: W1 / W2 / W4 / W5

PRODUCT VIEW



APPLICATION VIEW

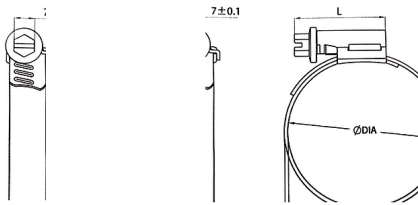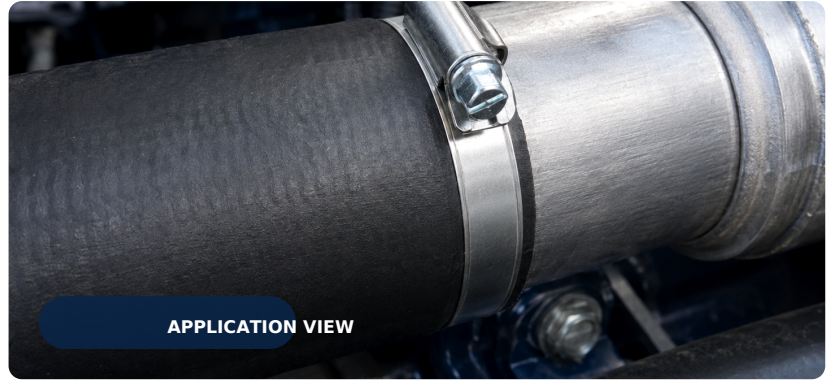

CONSTRUCTION

- 01** Partial housing
- 02** High torque
- 03** Even pressure
- 04** 9/12 mm band

SIZE RANGE (mm)	BANDWIDTH (mm)	THICKNESS W1 (mm)	THICKNESS W2/W4/W5 (mm)
8-12	9/12	0.8	0.7
10-16	9/12	0.8	0.7
12-22	9/12	0.8	0.7
16-27	9/12	0.8	0.7
20-32	9/12	0.8	0.7
25-40	9/12	0.8	0.7
30-45	9/12	0.8	0.7
32-50	9/12	0.8	0.7
40-60	9/12	0.8	0.7
50-70	9/12	0.8	0.7
60-80	9/12	0.8	0.7
70-90	9/12	0.8	0.7
80-100	9/12	0.8	0.7
90-110	9/12	0.8	0.7
100-120	9/12	0.8	0.7
110-130	9/12	0.8	0.7
120-140	9/12	0.8	0.7
130-150	9/12	0.8	0.7
140-160	9/12	0.8	0.7
150-170	9/12	0.8	0.7
160-180	9/12	0.8	0.7
170-190	9/12	0.8	0.7
180-200	9/12	0.8	0.7
190-210	9/12	0.8	0.7
200-220	9/12	0.8	0.7
210-230	9/12	0.8	0.7
220-240	9/12	0.8	0.7
230-250	9/12	0.8	0.7
240-260	9/12	0.8	0.7
250-270	9/12	0.8	0.7

All dimensions are in millimeters. Larger diameters are available on request.

MATERIAL OPTIONS

- W1 All parts: carbon steel
- W2 SS200/SS300 band and housing; carbon steel screw
- W4 All parts: SS200 or SS300 series
- W5 All parts: SS316

TYPICAL APPLICATIONS

- Cooling water, fuel and ventilation lines
- Oil lines and sanitary pipe connections
- Machine building and household appliances
- Commercial vehicle hose systems